


## Moisture Vapor Barrier



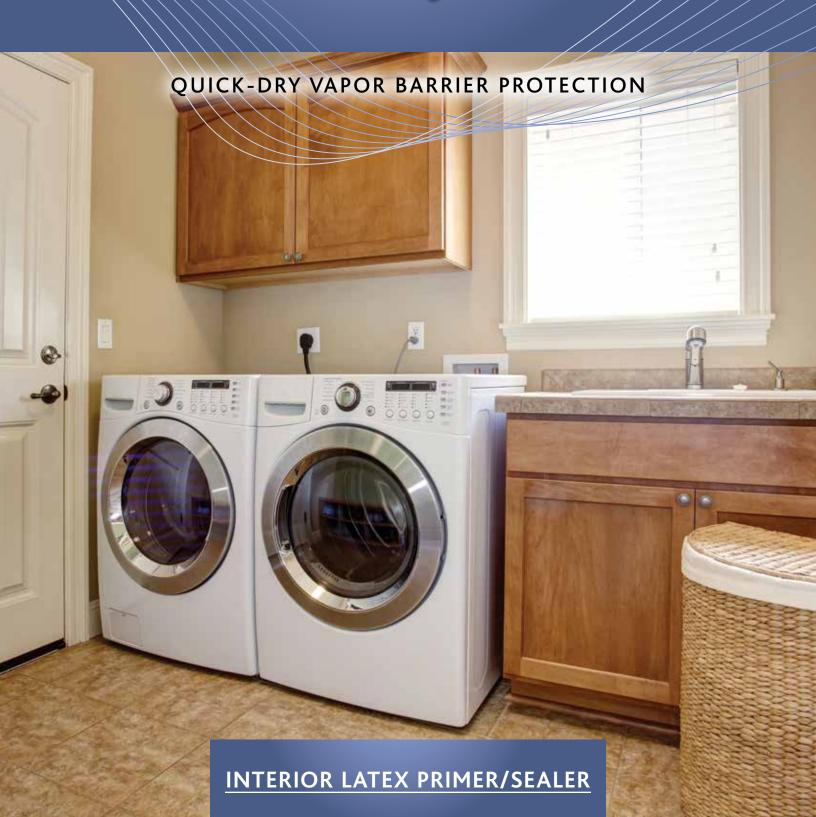

## SOLVE MOISTURE PROBLEMS FOR AN ATTRACTIVE, DEPENDABLE FINISH

Moisture Vapor Barrier Interior Latex Primer/Sealer is designed to help reduce the loss of moisture through walls and ceilings that can lead to mold and wood damage. Formulated to prime/seal and finish in a single, fast-drying coat and can be topcoated with any Sherwin-Williams interior latex or alkyd product for an attractive, dependable, long-lasting finish. And thanks



to its moisture vapor barrier properties and less than 50 g/L VOC, it is a cost-effective solution for the moisture vapor problems common in manufactured homes.



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818

MOISTURE VAPOR BARRIER BENEFITS	
The waterborne formula is user friendly, delivering easy cleanup with soap and water.	
Fast-drying primer/sealer and finish can be topcoated in as little as two hours. Compatible with any Sherwin-Williams architectural latex or alkyd interior topcoat.	
Meets the most stringent VOC regulations with <50 g/L VOC.	

## MOISTURE VAPOR BARRIER IS BROUGHT TO YOU BY A NAME YOU KNOW AND TRUST.

For over 150 years, Sherwin-Williams has provided contractors, builders, property managers, architects and designers with the trusted products they need to build their business and satisfy customers. Moisture Vapor Barrier is just one more way we bring you industry-leading paint technology — innovation you can pass on to your customers.

• UL/GREENGUARD® Gold Certified for low chemical emissions during application.

Plus, with more than 4,300 stores and 2,700 sales representatives across North America, personal service and expert advice is always available near jobsites. Find out more about Moisture Vapor Barrier at your nearest Sherwin-Williams store or to have a sales representative contact you, call **800-524-5979**.

