

SHERWIN-WILLIAMS®

Equipment Reference Guide

2026-2027



THE SINGLE SOURCE FOR ALL YOUR EQUIPMENT NEEDS.

SPRAY EQUIPMENT HANDHELD SPRAYERS PRESSURE WASHERS SPRAY ACCESSORIES
GENERATORS CLIMBING EQUIPMENT SPECIALIZED EQUIPMENT SURFACE PREP EQUIPMENT

SKYREACH™
by King

FESTOOL

TITAN

GRACO

Mi-T-M

WERNER

METALTECH

TOOLPRO
TOOLS FOR PROFESSIONALS

Your Equipment Is an Important Investment.

Improve your results, increase your productivity and help expand your business with the right equipment.

If you need guidance on choosing your equipment...	Check out our selection guides on pages 9-15, 35, 41-42, 53 , 59, 69-70, 77-78, 85-87 and 92.
Already know what you need?	Use the equipment charts on pages 16-31, 36-39, 43-51, 54-57, 60-67, 71-75, 79-80, 88-91 and 93-95 to compare features and make your selection.

Think ahead.

Be sure to choose equipment that will support your future growth goals as well as your current needs.

Table of Contents

Which Sprayer Is Right for You? 4-5

Anatomy of a Sprayer 6-7

Airless Sprayers 8-31

Spray Guns, Tips and Accessories 32-33

HVLP and Fine Finishing 34-39

Striping Equipment 40-51

Pressure Washers 52-57

Texture Sprayers 58-66

Air Compressors 67

Ladders 68-75

Generators and Portable Heaters 76-80

Spray Source Service Centers 81-83

Sanding, Abrasives and Dust Extractors 84-95



Sherwin-Williams also offers specialty units.

Ask your local store or sales representative for more information.

Which Sprayer Is Right for You?

Find the right equipment for your business — whether you're purchasing your first sprayer or looking to expand your capabilities.

If you do this type of work...

Choose this type of sprayer



I paint houses and commercial buildings where efficiency is key.

Airless

See pages 8 – 31.



I tackle smaller jobs — like doors and cabinets — that require more coverage and control.

HVLP and Fine Finishing

See pages 34 – 39.



I complete line striping and removal.

Line Stripers and Pavement Specialty

See pages 40 – 51.



I create wall and exterior texture.

Texture

See pages 58 – 66.

Anatomy of a Sprayer



+ Pump

The pump, or fluid section, is the heart of an airless sprayer. Piston pumps are very popular and contain valves and packings that work with the piston to pressurize paint. These only run when needed, and can handle thicker materials. Diaphragm pumps also use a piston, which moves hydraulic fluid in order to make a diaphragm to pull in paint and push it out of the gun — eliminating the need for packings that can need replacement over the sprayer's lifetime.

+ Spray Gun

Every sprayer needs a spray gun, and options range from basic to premium. More advanced spray guns weigh less, require less trigger pressure, and can be adjusted for user comfort to significantly reduce fatigue.

+ Hose

Maximum hose length options range from 50' to 300'. Longer hoses provide excellent flexibility on new residential and commercial jobsites, but take much more material to fill before spraying. Balancing the number of guns, hose length and motor size is an important part of productivity.

+ Motor and Drive System

Electric airless pump motors come in AC, DC and Universal, with DC being the most common and the most forgiving of power fluctuations on the jobsite. As motor size increases, so do the maximum PSI and GPM. Gas engines vary by CC output, which is a measure of volume (cubic cm).

+ Tip

Tips have the most impact on the finish. Picking a tip that works with your coating and sprayer is imperative. Using a worn tip causes an uneven finish and lost profit in increased overspray. Using a low pressure tip can limit overspray and prolong overall tip life.

+ Chassis

Sprayer configuration impacts its portability and storage requirements. Many pumps come in both high (vertical) and low (horizontal) configurations, both with wheels to make it easy to move. Some smaller pumps are also available in a stand configuration, which is small enough to be carried by hand. Some sprayers are even designed to be handheld to further improve mobility on smaller jobs.

Airless Sprayers

Choosing an Airless Sprayer

Use your answers to the following questions to help narrow your selection as you look through this guide.

What are your power source requirements?



If you have this requirement...	Consider this power source	
I prefer battery-powered technology.	Battery	See Pages 16 – 24
My jobs require quiet operation.	Battery/Electric	See Pages 16 – 24
I work indoor jobs so I can't have emissions.	Battery/Electric	See Pages 16 – 24
Some of my jobs do not have access to electricity.	Battery/Gas	See Pages 25 – 30
My jobs require portability.	Battery/Gas	See Pages 25 – 31
I need a sprayer capable of very high output.	Gas	See Pages 25 – 31
I need the versatility of both power sources.	Convertible	See Pages 27 – 30

How much paint do you spray per week?



The airless sprayers in this guide are organized by gallons per week. Look for your desired productivity to start narrowing your selection.

It's a good idea to allow your business room to grow when you begin considering sprayer capability options.

Consider this:

- What material types will you spray? Now and in the future?
- How many gallons do you currently spray apply per week?
- How much do you spray on your busiest weeks?
- Do you expect this amount to grow in the near future?

What is your maximum crew size?



Choose adequate gun support for your crew size now — and in the near future.

Airless sprayers can support from 1-6 guns, depending on motor size, hose length and paint viscosity. Make sure you account for tip size when thinking through how you'll use multiple guns.

What are your mobility requirements?



Sprayer hose length can range from 50' to 300'. Be sure your hose length can accommodate the way you work.

- If you want to keep the sprayer nearby while you work, a 50' hose will do.
- If you want to move within a building while keeping your sprayer stationary, choose a longer option.

Choosing the Right Spray Tip

The type of paint you are spraying determines your tip size. Choosing the right tip for the job will affect the quality of your finish – and help you save time and money.

Here’s how you can easily find the right tip size for the type of paint you plan to spray:

1. By the specific paint you use:

Tip sizes for all Sherwin-Williams paints can be found on their Material Data Sheet. This is true for most paints and coatings.

2. By using the generally recommended tip size:

Refer to the chart below to find the ideal tip.

Type of Coating	Tip Size
Stains	.006 - .015
Lacquers	.011 - .017
Latex-based	.013 - .021
Oil-based	.013 - .017
Block fillers	.019 - .031
Smooth elastomerics	.019 - .035+



+ Tip Size

The numbers represent the tip size and indicate how much paint will flow through the tip.

- 5 The first digit represents half the fan width (5 x 2 = 10-inch fan width).
- 17 The last two digits represent the size of the tip opening in thousandths of an inch.

Good rules of thumb:

Light viscosity coatings


When applying light viscosity coatings, like stains and lacquers, use spray tips with smaller orifice sizes.

Heavy viscosity coatings

For heavier viscosity coatings, like latex, use spray tips with larger orifices.

Count the cost of worn tips

- Worn tips use more paint.
- Worn tips produce uneven and inconsistent coverage.
- Worn tips require more passes and reduce production.
- Worn tips result in a poor-quality finish.

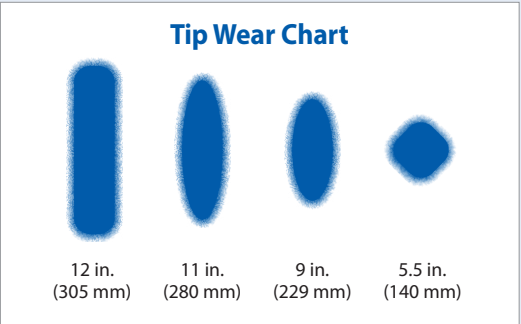

Graco Tip Technology

GOOD	BETTER		BEST		
RAC® 5	RAC X™		RAC X™ LOW PRESSURE		
RAC 5	LTX	WIDERAC	FINE FINISH LOW PRESSURE	LOW PRESSURE	WIDERAC LOW PRESSURE
Tip Range - .007 - .065	Tip Range - .007 - .071	Tip Range - .021 - .039	Tip Range - .006 - .016	Tip Range - .013 - .031	Tip Range - .021 - .033
OneSeal: Latex - 243281 Solvent - 224081	OneSeal: Latex - 246453 / Solvent - 248936		OneSeal: Latex - 17P501 / Solvent - 17P502		
Precision spray tip provides excellent fan pattern life and high-quality finish	Longest-lasting standard pressure tip on the market	Produces a 24" fan pattern to finish the job in half the time	Atomize fine finish materials at half the pressure for an HVLP-like finish	Dial down the pressure for less overspray, longer tip life, and a perfect airless finish	All the benefits of RAC X Low Pressure Tips, now in a 24" fan pattern
Residential, commercial, interior and exterior applications	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces	Trim, molding, cabinets, woodwork, metal	Residential, commercial, interior and exterior applications	New construction and high production with large surfaces
Latex, oil-based paints, elastomeric, block filler	Latex, oil-based paints, elastomeric, block filler		Lacquer, varnish, stain, enamel paint	Latex, oil-based paints, elastomeric, block filler	



Titan Tip Technology

Match the tip color to the application.

Low Pressure	Low Pressure	Standard Pressure	Standard Pressure	Max Pressure
HEA™ 800 – 1200 PSI	Fine Finish 1200 – 1800 PSI	SC-6+ 1500 – 5000 PSI	Line Striping 3000 – 5000 PSI	High Pressure 3000 – 7700 PSI
Optimized for low overspray on large-surface applications.	Delivers a flawless finish for cabinets, trim and more.	Designed for maximum productivity.	Perfect for field and pavement striping.	Perfect for protective coatings, commercial and industrial applications.



A CENTURY OF INNOVATION. A FUTURE OF POSSIBILITY.



**Ultimate™
QuickShot™ II**

**THE FASTEST WAY TO THE
PERFECT FINISH**

NEW PROFESSIONAL-GRADE FILTRATION
FOR THE PERFECT AIRLESS FINISH

NEW QUICK CLEANING MODE FLUSHES 2X FASTER
WITH A FRACTION OF THE WATER

NEW RAPID JOBSITE SERVICE FROM
PUMP-TO-GUN WITH PROCONNECT™



LEARN MORE graco.com/ContractorTools

©2025 Graco Inc. 12/25 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. Trademarks are referenced herein for identification purposes only. All trademarks are the property of their respective owners. Product covered by issued and pending patents, see graco.com/patents. DeWALT® and the DeWALT Logo are trademarks of DeWALT Industrial Tool Co. and are used under license. With respect to 20V MAX, maximum initial battery voltage (measured without workload), is 20 volts. Nominal is 18 volts.



Available Exclusively at Sherwin-Williams.

**EXPERIENCE THE NEW STANDARD FOR
ENTRY-LEVEL PRODUCTIVITY**

**ULTIMATE™
390-450**

**LIGHTEST WEIGHT PROFESSIONAL
SPRAYERS EVER BUILT**

**LONGEST-LIFE ENTRY LEVEL
SPRAYERS ON THE MARKET**

**MAXIMIZE UPTIME WITH
FAST ON-THE-JOB SERVICE**



**EXPERIENCE AIRLESS
LIKE NEVER BEFORE**

**ULTIMATE XT™
490 XT-1095 XT**

**FIRST MOTOR EVER DESIGNED SPECIFICALLY
FOR AIRLESS SPRAY – MANUFACTURED BY GRACO**

**UNRIVALED FINISH QUALITY WITH THE
WORLD'S STEADIEST RUNNING PRESSURE**

**UP TO 10X QUIETER WITH THE
NEW SOUND OF QUALITY™**



**MAXIMIZE PERFORMANCE WITH THE
CONTRACTOR POWERSHOT™
ELECTRIC POWERED GUNS
(SOLD SEPARATELY)**





FINE FINISH AT ITS FINEST

All-New Capspray X™

HVLP SPRAYERS | Combining neXt-level power and extreme agility.

CAPSPRAY X 115

EXTREME POWER. QUIET PRECISION.
All the advanced tech in one powerhouse unit: quieter, cooler, and variable pressure control for flawless fine-finish work.



BUILT WITH NEXT-GEN TECHNOLOGY



NEW

WHISPERTECH™
Intelligent turbine control that drops to a quiet idle to cut noise and heat—then fires back instantly when you pull the trigger.
Available on Capspray X 115

NEW VARIABLE PRESSURE CONTROL (VPC)

With the twist of a dial fine-tune your pressure for any coating or surface. Get eXact control and smooth, consistent results for every coating.
Available on Capspray X 115



MAXUM II GUN + CAPLINER™

The CapLiner system sprays at any angle and cleans up fast.



CAPSPRAY X 105
EXTRA MUSCLE. EXACT CONTROL.



CAPSPRAY X 95
RELIABLE PERFORMANCE. PRO-LEVEL VALUE.

CAPSPRAY X



SEALED HYDRAULIC POWER

Elite® & PowrLiner™

SEALED HYDRAULIC SYSTEMS

Elite performance, Ultimate durability.

PERMASTROKE TECHNOLOGY™

- Flawless performance at 300 to 3300 PSI
- No deadband, flawless fan pattern

MAXIMUM DURABILITY

- No pistons, packings, cylinder or clutch to wear out
- Lifetime fluid pump warranty

EASY PRIME WITH THE SUREFLO PUSHER VALVE™

POWERED BY HONDA®

FIELD SERVICEABLE



Two wear parts that can be changed in 5 minutes or less.



ELITE 3500 72V
INDUSTRY'S FIRST BATTERY POWERED SPRAYER *at this level*



ELITE 5500
GAS, TWO-GUN AIRLESS SPRAYER



ELITE 3500
GAS, ONE-GUN AIRLESS SPRAYER

ELITE

POWRLINER



POWRLINER 5500 Powered by HONDA
TWO-GUN LINE-STRIPPING PRECISION



POWRLINER 3500 72V Powered by HONDA
BATTERY-POWERED LINE STRIPER

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	Occasional Use		1-5 Gallons		
					
MODEL	GRACO Ultimate™ Airless Handheld – Cordless	GRACO Ultimate MX™ Airless Handheld – Cordless	GRACO Ultimate™ QuickShot	GRACO Ultimate™ QuickShot II	GRACO MAGNUM® X5
Frame Mount - High	—	—	—	—	—
Handheld	✔ 1012-94726	✔ 1012-94734	✔ 6513-13256	✔ 6514-57806	—
Frame Mount - Stand	—	—	—	—	✔ 6509-47468
Gallons Per Minute (GPM)	.20	.20	.20	.20	.27
Supports Tip Size*	.016	.016	.016	.016	.015
Maximum Fluid Pressure (PSI)	2000	2000	2000	2000	3000
Weight	5.3 Lbs.	5.5 Lbs.	6.4 Lbs.	6.4 Lbs.	13 Lbs.
Pump Type	Triax II Piston Pump with ProConnect	Triax II Piston Pump with ProConnect	QuickShot ProConnect Piston Pump	QuickShot II ProConnect Piston Pump	Piston
Motor Size/Type	1/4 HP DC	1/4 HP Brushless DC	1/4 HP Brushless DC	1/4 HP Brushless DC	1/2 HP Universal
Available Models** (See below for model description)	B, C	B, C	D	D	A
Guns Supported	—	—	—	—	1
CETL Certified	✔	✔	✔	✔	✔

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B Includes (2) DeWALT 20V Max Compact lithium-ion batteries, charger, tool bag, RAC X™ FFLP SwitchTips and FlexLiner Bags

C Tool only model includes RAC X™ FFLP SwitchTip and FlexLiner Bags; DeWALT batteries and charger not included

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

1-5 Gallons			1-10 Gallons		
					
TITAN ControlMax™ 1500	TITAN Impact® X 120 18V	TITAN ControlMax™ 1700	GRACO MAGNUM® ProX17	GRACO MAGNUM® ProX19	TITAN ControlMax™ 1900
—	—	—	—	✔ 6509-47484	✔ 1025-10831
—	—	—	—	—	—
✔ 1025-10849	✔ 1030-76857	✔ 1023-36823	✔ 6509-47476	—	—
.29	.31	.33	.34	.38	.40
.015	.017	.017	.017	.019	.019
1500	1600	1500	3000	3000	1600
19 Lbs.	11 Lbs.	23 Lbs.	27 Lbs.	38 Lbs.	40 Lbs.
Piston Pump	Piston	Piston Pump	Power-Piston Pump with ProXchange™	Power-Piston Pump with ProXchange™	Piston Pump
.55 HP	18v 4 Ah AMPShare by Bosch Battery	.60 HP	3/4 HP DC	7/8 HP DC	.70 HP
A	E	A	A	A	A
1	1	1	1	1	1
✔	✔	✔	✔	✔	✔

D Includes QuickShot Belt & Holster, (2) DeWALT 20V Compact lithium-ion batteries, charger, tool bag and (2) RAC X™ FFLP SwitchTips

E Includes RX-80™ Gun, HEA™ 517 Tip, 312 Fine Finish Tip and 9' Hose; 2 Bosch AMPShare 4 Ah Batteries and Charger

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	11-50 Gallons		
			
MODEL	GRACO Ultimate™ 390	GRACO Ultimate™ 390 Cordless	TITAN Elite® 2000
Frame Mount - High	 1033-03954	 1023-40981	—
Frame Mount - Low	—	—	—
Frame Mount - Stand	 6513-94678	 1023-29935	 1030-76865
Gallons Per Minute (GPM)	.47	.47	.47
Supports Tip Size*	.021	.021	.021
Maximum Fluid Pressure (PSI)	3300	3300	3000
Weight	28 Lbs.	31 Lbs.	51 Lbs.
Pump Type	Endurance Vortex Piston Pump with ProConnect	Endurance Piston Pump with ProConnect	PermaStroke Sealed Hydraulic
Motor Size/Type	7/8 HP Brushless DC	5/8 HP Brushless DC	1.0 HP DCX
Available Models** (See below for model description)	A	B	A
Guns Supported	1	1	1
CETL Certified			

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B Includes (2) DeWALT 20V Max Compact lithium-ion batteries, charger, tool bag, RACX™ FFLP SwitchTips and FlexLiner Bags

C Select models include Brushless Motor, Endurance Vortex Piston Pump ProConnect, SmartControl with digital display, FastFlush, WatchDog, and Contractor PC gun, hose and tip.

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

11-50 Gallons	51-75 Gallons			
				
TITAN Impact® X 410	GRACO Ultimate™ 395	TITAN Impact® X 440	GRACO Ultimate™ 450	TITAN Impact® X 540I
 1028-37051	 1033-03939	 1028-37044	 1033-03947	 1031-10730
—	 1033-03921	—	 6513-94876	 1031-10748
 6513-05666	 6513-94728	 6513-05658	 6513-94777	 1031-10722
.47	.54	.54	.54	.54
.021	.023	.023	.023	.023
3300	3300	3300	3300	3300
30 Lbs. (Stand) 54 Lbs. (High)	28 Lbs. (Stand)	30 Lbs. (Stand) 54 Lbs. (High)	29 Lbs. (Stand)	30 Lbs. (Stand) 54 Lbs. (High & Low)
MaxFX Piston with Quad+ Packings™	Endurance Vortex Piston Pump with ProConnect	MaxFX Piston with Quad+ Packings™	Endurance Vortex Pump with ProConnect	MaxFX Piston with Quad+ Packings™
1.10 HP Brushless	11 HP Brushless DC	1.2 HP DuraLife Brushless DC	1.1 HP Brushless DC	1.2 DuraLife Brushless HE
A	A	A	C	D
1	1	1	1	1
				

D IntelliSync models include TipAware™, ProStart™ and the InCommand™ Dashboard

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	51–75 Gallons	76–100 Gallons		
				
MODEL	TITAN Elite® 3000	GRACO Ultimate 490 XT™	TITAN Impact® 640I	TITAN Impact® 640IA
Frame Mount - High	 1019-89309	 1029-06229	 1027-12684	 1027-12718
Frame Mount - Low	 1019-89309	 1029-06211	 1027-12692	 1027-12726
Frame Mount - Stand	—	1029-06104	 1027-12668	 1027-12700
Gallons Per Minute (GPM)	.60	.70	.70	.70
Supports Tip Size*	.025	.025	.027	.027
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	103 Lbs. (High & Low)	31 Lbs. (Stand)	69 Lbs. (High)	69 Lbs. (High)
Pump Type	Sealed Hydraulic	Endurance Vortex Piston Pump with ProConnect	Piston	Piston
Motor Size/Type	1.2 HP DCX	1.3 HP Xtreme Torque Brushless DC	1.55 HP DuraLife Brushless DC	1.55 HP DuraLife Brushless DC
Available Models** (See below for model description)	A	D	B	A, C
Guns Supported	1	1	1	1
CETL Certified				

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

**Model description

A Standard

B IntelliSync models include TipAware®, ProStart® and the InCommand™ Dashboard

C IntelliSync with ActivGuard™ models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

101–150 Gallons		
		
TITAN Impact® 740	GRACO Ultimate 495 XT™	GRACO Ultimate 650 XT™
 957-6976	 1029-06252	 1029-06278
—	 1029-06245	 1029-06260
—	 1029-06237	—
.80	.80	.90
.029	.027	.029
3300	3300	3300
87 Lbs. (High)	31 Lbs. (Stand)	68 Lbs. (Hi-Boy)
Piston	Endurance Vortex Piston Pump with ProConnect	Endurance Vortex Piston Pump with ProConnect
2.0 HP DuraLife Brushless DC	1.7 HP Xtreme Torque Brushless DC	1.9 HP Xtreme Torque Brushless DC
A	D	D
2 (.017 Tip)	1	2 (.019 Tip)
		

D Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, WatchDog, Contractor PC Gun, Hose and RAC X™ LP SwitchTip

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	151–200 Gallons			
				
MODEL	GRACO Ultimate MX II™ 695	TITAN Impact® 840I	TITAN Impact® 840IA	GRACO Ultimate 695 XT™
Frame Mount - High	 Standard 6510-99046	 1027-12734	 1027-12759	Standard 1029-06286 ProContractor 1029-06120
Frame Mount - Low	—	 1027-12742	 1027-12676	1029-06112
Frame Mount - Stand	—	—	—	—
Gallons Per Minute (GPM)	.95	1.00	1.00	1.05
Supports Tip Size*	.031	.032	.032	.031
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	93 Lbs. (Hi-Boy)	87 Lbs. (High)	87 Lbs. (High)	93 Lbs. (Hi-Boy)
Pump Type	Endurance Piston Pump	Piston	Piston	Endurance Vortex Piston Pump with ProConnect
Motor Size/Type	2.0 HP MaxPower Brushless DC	2.3 HP DuraLife Brushless DC	2.3 HP DuraLife Brushless DC	2.1 HP Xtreme Torque Brushless DC
Available Models** (See below for model description)	A	A, B	C	D, E
Guns Supported	2 (.023 Tip)	2 (.021 Tip)	2 (.021 Tip)	2 (.023 Tip)
CETL Certified				

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

**Model description

A Standard

B IntelliSync models include TipAware®, ProStart® and the InCommand™ Dashboard

C IntelliSync with ActivGuard™ models include TipAware®, ProStart®, InCommand™ Dashboard and ActivGuard™ Real-Time GPS

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

151–200 Gallons			
			
GRACO Ultimate MX II™ 795	TITAN Impact® 1040	TITAN Impact® 1140I	TITAN Impact® 1140IA
 Standard 1017-97264	 1002-45752	 1025-19196	 1025-19204
—	—	1031-22834	1031-22842
—	—	—	—
1.10	1.15	1.20	1.20
.033	.033	.034	.034
3300	3300	3300	3300
98 Lbs. (Hi-Boy)	98 Lbs.	102 Lbs. (High & Low)	102 Lbs. (High & Low)
Endurance Piston Pump	Piston	Piston	Piston
2.2 HP MaxPower Brushless DC	2.5 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC	2.6 HP DuraLife Brushless DC
A	A	B	C
3 (.019 Tip)	2 (.022 Tip)	2 (.023 Tip)	2 (.023 Tip)
			

D Standard Series XT — Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, Contractor PC Gun, Hose and RAC X™ LP SwitchTip

E ProContractor Series XT — All Standard Series XT features plus QuickReel, Endurance Vortex MaxLife Pump, Crush Proof Rock Catcher, Smart Display and BlueLink

Electric Airless Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	151–200 Gallons		201–500 Gallons
			
MODEL	GRACO Ultimate 795 XT™	GRACO Ultimate MX II™ 1095	GRACO Ultimate 1095 XT™
Frame Mount - High	✓ Standard 1029-06138 ProContractor 1029-06146	✓ Standard 1017-97280	✓ Standard 1029-06153 ProContractor 1029-06161
Frame Mount - Low	—	—	—
Frame Mount - Stand	—	—	—
Gallons Per Minute (GPM)	1.20	1.20	1.30
Supports Tip Size*	.033	.035	.037
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	88 Lbs. (Hi-Boy)	120 Lbs. (Hi-Boy)	101 Lbs. (Hi-Boy)
Pump Type	Endurance Vortex Piston Pump with ProConnect	Endurance Piston Pump	Endurance Vortex Piston Pump with ProConnect
Motor Size/Type	2.3 HP Xtreme Torque Brushless DC	2.4 HP MaxPower Brushless DC	2.7 HP Xtreme Torque Brushless DC
Available Models** (See below for model description)	B, C	A	B, C
Guns Supported	3 (.019 Tip)	3 (.021 Tip)	3 (.023 Tip)
CETL Certified	✓	✓	✓

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B Standard Series XT — Xtreme Torque Motor, Endurance Vortex Piston Pump ProConnect, Rapid Response Control with LED Display, Performance Modes, TurboClean, Contractor PC Gun, Hose and RAC™ LP SwitchTip

C ProContractor Series XT — All Standard Series XT features plus QuickReel, Endurance Vortex MaxLife Pump, Crush Proof Rock Catcher, Smart Display and BlueLink

Gas Mechanical Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	50-100 Gallons	76-100 Gallons		101-150 Gallons
				
MODEL	GRACO GMAX™ 3400	TITAN Elite 3500 72V	TITAN Elite® 3500	TITAN Elite® 5500
Frame Mount - High	✓ Honda 1017-97470 Kohler 1024-95611	✓ 1033-21626 (1 battery) 3500 72V 1033-21634 (2 battery)	✓ 1013-13526	✓ 1032-52466
Frame Mount - Low	—	—	✓ 1013-13534	—
Frame Mount - Stand	—	—	—	—
Gallons Per Minute (GPM)	.75	.75	.75	1.25
Supports Tip Size*	.027	.027	.027	.036
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	89 Lbs.	103 Lbs.	103 Lbs.	104 Lbs. (High)
Pump Type	Endurance Piston Pump	Sealed Hydraulic	Sealed Hydraulic	PermaStroke Sealed Hydraulic
Motor Size/Type	120cc Honda or 177cc Kohler	72V Honda Battery	120cc Honda	160cc Honda
Available Models** (See below for model description)	A	A	A	A
Guns Supported	1	1	1	2 (.023 Tip)
CETL Certified	—	—	—	—

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

Gas Mechanical Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	101-150 Gallons	500+ Gallons	
			
MODEL	GRACO GMAX™ II 3900	GRACO GMAX™ II 5900	GRACO GMAX™ II 7900
Frame Mount - High	✓ Standard Honda 1017-97496 Standard Kohler 1024-95629 ProContractor Honda 1017-97504	✓ Standard Honda 1017-97546 Standard Kohler 1024-95637 ProContractor Honda 1017-97553 IronMan Honda 1017-97561	✓ Standard Honda 1017-97595 Standard Kohler 1024-80985 ProContractor Honda 1017-97603 IronMan Honda 1017-97611
Frame Mount - Low	✓ Standard Honda 1017-97488	✓ Standard Honda 1017-97512	✓ Standard Honda 1017-97579
Frame Mount - Stand	—	—	—
Gallons Per Minute (GPM)	1.25	1.60	2.20
Supports Tip Size*	.036	.043	.048
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	109 Lbs. (Hi-Boy)	139 Lbs. (Hi-Boy)	146 Lbs. (Hi-Boy)
Pump Type	Endurance Piston Pump	Endurance Piston Pump	Endurance MaxLife Piston Pump
Motor Size/Type	120cc Honda or 177cc Kohler	200cc Honda or 208cc Kohler	200cc Honda or 208cc Kohler
Available Models** (See below for model description)	A, B	A, B, C	A, B, C
Guns Supported	2 (.023 Tip)	3 (.023 Tip)	4 (.023 Tip)
CETL Certified	—	—	—

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Standard

B ProContractor Series includes Endurance Vortex MaxLife Pump, ProConnect 2, QuikReel Hose Management System, LED Display, WatchDog Pump Protection System, Crush Proof Rock Catcher, Contractor PC gun, hose and tip

C IronMan Series includes Endurance Vortex MaxLife EXTREME Pump, ProConnect 2, FlatproofTires, LED Display, WatchDog Pump Protection System, Crush Proof Rock Catcher, Contractor PC gun, hose and tip

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	200-500 Gallons	501+ Gallons	
			
MODEL	GRACO GH 130	TITAN PowrTwin™ 4900 Plus	GRACO GH 200
Frame Mount - High	—	—	—
Frame Mount - Low	✓ 1005-55747	✓ 599-4116	✓ Standard 1005-55762
Frame Mount - Stand	—	—	—
Gallons Per Minute (GPM)	1.30	1.50	2.15
Supports Tip Size*	.037	.044	.047
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	150 Lbs.	132 Lbs.	160 Lbs.
Pump Type	Endurance Piston Pump	Hydraulic Piston	Endurance Piston Pump
Motor Size/Type	120cc Honda	160cc Honda	160cc Honda
Electric Conversion Kit	Option	Option	Option
Available Models** (See below for model description)	A	A	A
Guns Supported	2 (.023 Tip)	3 (.025 Tip)	4 (.023 Tip)
CETL Certified	✓ With Optional Electric Conversion Kit	—	✓ With Optional Electric Conversion Kit

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Complete units include gun, hose and tip

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	501+ Gallons		
			
MODEL	TITAN PowrTwin™ 6900 Plus	TITAN PowrTwin™ 6900 Plus DI	GRACO GH 230
Frame Mount - High	—	—	—
Frame Mount - Low	✔ 599-4124	✔ 117-3137	✔ Standard 1005-55788 ProContractor™ 1005-55796
Frame Mount - Stand	—	—	—
Gallons Per Minute (GPM)	2.25	2.25	2.35
Supports Tip Size*	.050	.050	.053
Maximum Fluid Pressure (PSI)	3300	3300	3300
Weight	139 Lbs.	190 Lbs.	168 Lbs.
Pump Type	Hydraulic Piston	Hydraulic Piston	Endurance Piston Pump
Motor Size/Type	160cc Honda	160cc Honda	200cc Honda
Electric Conversion Kit	Option	Option	Option
Available Models** (See below for model description)	A	A	A, B
Guns Supported	4 (.025 Tip)	4 (.025 Tip)	5 (.024 Tip)
CETL Certified	✔ With Optional Electric Conversion Kit	✔ With Optional Electric Conversion Kit	✔ With Optional Electric Conversion Kit

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Complete units include gun, hose and tip

B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, Crush Proof Rock Catcher, gun, hose and tip

C Bare

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

501+ Gallons			
			
TITAN PowrTwin™ 8900 Plus	GRACO Mark HP XT™	GRACO DutyMax GH 675 DI	GRACO GH 933
—	—	—	—
✔ 100-1965	✔ Big 150 Package 1041-43458	1015-61710	✔ Bare 1000-22177 Complete 1000-19884 Big 250 Package 1002-24088
—	—	—	—
2.50	1.40	1.50	2.50
.054	.041	.041	.053
3300	6750	6750	7250
154 Lbs.	140 Lbs.	218 Lbs.	385 Lbs.
Hydraulic Piston	Endurance ProConnect	Endurance Piston Quick Change	Xtreme Piston Quick Change
200cc Honda	4.1 HP Xtreme Torque Brushless DC	270cc Honda	390cc Honda
Option	—	—	—
A	A	A	A, C
5 (.024 Tip)	3 (.025 Tip)	3 (.023 Tip)	5 (.023 Tip)
✔ With Optional Electric Conversion Kit	—	—	—

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Gallons Per Week	501+ Gallons			
				
MODEL	GRACO King E-MAX XT 70	GRACO GH 300	TITAN PowrTwin™ 12000 Plus DI	TITAN PowrTwin™ 12000 Plus
Frame Mount - Low	✓ Bare 200-9104 Complete 200-9114 Big 250 Package 200-9126 Big 250 with EFP-350 XT Feed Pump 201-1369	✓ Standard 1005-55804 ProContractor™ 1005-55812	✓ 119-6799	✓ 599-4157
	Gallons Per Minute (GPM)	2.90	3.00	3.15
	Supports Tip Size*	.053	.057	.058
	Maximum Fluid Pressure (PSI)	7250	3300	3600
Weight	340 Lbs.	195 Lbs.	194 Lbs.	183 Lbs.
Pump Type	Endurance ProConnect	Endurance Piston Pump	Hydraulic Piston	Hydraulic Piston
Motor Size/Type	Xtreme Torque 8 HP Brushless DC	270cc Honda	270cc Honda	270cc Honda
Electric Conversion Kit	—	Option	Option	Option
Available Models** (See below for model description)	A	A, B	A	A
Frame Mount - High	A	—	—	—
Frame Mount - Stand	—	—	—	—
Guns Supported	4+	5 (.025 Tip)	6 (.024 Tip)	6 (.024 Tip)
CETL Certified	In Process	✓ With Optional Electric Conversion Kit	—	✓ With Optional Electric Conversion Kit

* Number of guns, tip size, hose length and hose diameter affect fluid pressure

** Model description

A Complete units include gun, hose and tip

B ProContractor Series includes Endurance MaxLife Pump, ProConnect, QuikReel, Crush Proof Rock Catcher, gun, hose and tip

C Bare

Gas Hydraulic Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

501+ Gallons		
		
TITAN Hydra™ X 4540	GRACO GH 833	TITAN Hydra™ X 7230
1024-44841	✓ Bare 1000-22151 Complete 1000-22169 Big 250 Package 1000-22292	1024-44932
4.00	4.00	3.00
.067	.065	.057
4500	4000	7250
385 Lbs.	350 Lbs.	385 Lbs.
Hydraulic Piston	Endurance MaxLife Piston Quick Change	Hydraulic Piston
390cc Honda with Electric Start	390cc Honda	390cc Honda with Electric Start
—	—	—
C	A, C	C
—	—	—
—	—	—
6 (.021 Tip)	6 (.026 Tip)	5 (.021 Tip)
—	—	—

Spray Guns, Tips and Accessories

We carry a full line of accessories, including gun, hose and tip kits, gun extensions, filters and hoses.



Graco Contractor® PowerShot® & PowerShot XT

- Industry's most advanced airless guns ever built
- Electric-powered gun virtually eliminates spits
- Industry's lightest gun featuring the lightest trigger pull
- Remotely adjust pressure from over 200' away
- Eliminates gun kickback with SmartStall™ to reduce fatigue
- Includes 2 DeWALT® batteries



Titan RX-80™ Spray Gun

- Balanced ergonomic design delivers added comfort
- Convenient built-in filter wrench
- Newly designed packing kit improves performance and increases life



Graco Contractor® Airless Spray Gun

- Industry standard for performance and durability
- Exclusive FlexSeal design — 70% longer life
- Premium nickel finish for easy cleaning
- Available in 2- or 4-finger trigger
- Industry-proven Graco quality



Graco JetRoller™ System

- Combines rolling and spraying into one action, saving time and labor costs
- Ideal for applications that require a backroll finish
- Minimum overspray; minimum prep and cleanup required
- Easily detachable handle for use as pole gun/extension gun
- Uses standard roller covers (not included)



Titan Spray Roller & Spray Guide with Swivel Kit

- Reduces overspray, decreasing prep work
- Provides consistent mil thickness on textured surfaces
- Gives a roller finish; easier to touch up
- Modular design
- Uses any standard 9" roller cover



Titan SprayGuide™

- Allows you to effectively cut in while using a spray gun
- Eliminates the need to use a spray shield
- Minimizes cutting in with a brush
- Connects to most airless spray guns



Titan Pro V75 Heat Gun

- Used for paint stripping, paint drying, softening caulk and adhesives, and more
- Versatile, handheld and flameless
- 125–1300 degree temperature range/6-speed fan
- 117 temperature settings



Graco Contractor PC™ Airless Spray Guns

- Lightest, most comfortable mechanical spray guns ever built
- Lightest traditional trigger pull and hold force
- E-Z trigger length adjustment; 2-, 3- or 4-finger length (Contractor PC only)
- Complete gun rebuild in seconds with ProConnect™ replacement cartridge (part# 17Y297)



Titan RX-Apex™ Spray Gun

- "All-Day" trigger has 30% lighter trigger pull force and over 60% lighter hold force
- FingerPrint+ Grip™ — adjustable grip delivers maximum customization
- Infinity Packing® System means fluid passages contain reversible seat and replaceable ball
- Filtered and non-filtered versions



Titan RX-Pro® Airless Spray Gun

- 2- and 4- finger trigger
- Unique Infinity Packing® offers 2x the life
- Customize the size and fit of the handle with FingerPrint Grip®
- Ultra-light trigger pull decreases fatigue



Graco Contractor FTx® Airless Spray Gun

- Lightweight, smooth trigger pull
- Exclusive FlexSeal design — 70% longer life
- Available in 2- or 4-finger trigger



ProConnect™ Pump Removal and Installation Systems

- Ability to remove sprayer pump and replace it in seconds
- Eliminates costly jobsite downtime
- Ability to have a spare pump at all times
- One pump fits all small and mid-sized Graco electric sprayers
- Replacement pump sold individually at any Sherwin-Williams store



Pressure Washer Accessories

- At Sherwin-Williams, you'll find a wide assortment of tips, connectors, non-marking hoses and extra guns for pressure washers



Graco RAC X™ Low Pressure (LP, WRLP and FFLP) SwitchTips

- Spray at up to 50% lower spray pressure, resulting in:
 - Up to 2x longer tip life
 - Up to 50% less overspray
 - Easiest pattern overlap
 - Reduced prep and cleanup time
- 46 tip sizes for all applications
- Small sizes for fine finishing applications
- Large sizes for high-volume and heavy-coating applications



Graco RAC X™ SwitchTips

- Premium quality tip
- Tip line includes 107 sizes for every application
- Longest-lasting fan pattern



Graco RAC® V SwitchTip

- Long-lasting high-pressure tip for commercial and residential painting applications
- 90+ sizes for all applications



Impact® X MaxFX Fluid Section

- Equipped with a durable PermaLife™ cylinder that never wears and never needs replacing
- Quick change style fluid section that is replaceable in minutes on the jobsite
- Quad+™ packings last up to 50% longer than the competition
- Self-adjusting so you never have to worry about over tightening, which leads to premature wearing



Titan SC-6+ Reversible Tips

- Produces sharper lines with minimal edge feathering so you can spray with fewer passes
- Proprietary carbide formula guarantees highest quality and maximum tip life
- Flow indicator shows if the tip is in spray position or cleaning position. Insertion and knockout tool for simple assembly
- Ergonomic design assures comfort when rotating to spray or reverse position for cleaning



Titan HEA Tips

- Ideal for new residential, residential repaint and commercial applications
- Optimized to atomize paints and coatings at 1000 PSI with no loss in production
- Up to 55% less overspray
- Two times the life of a standard reversible tip
- Longer sprayer life — pump more gallons before repack is needed
- Ideal for all contractors — new to spraying or master painters



Titan SC-6+ Fine Finish Tips

- Ideal for lacquers, stains, sealers and clear coats
- Particle size is up to 27% finer than a standard tip
- Fits all industry standard tip guards



Titan 1/4" Micro Swivel

- Used between the sprayer and hose, hose and hose, or hose and gun to eliminate kinking and damage to your spray hose
- Stainless-steel construction allows for use with all materials
- Provides full 360° rotation even under high pressure, making hose management safer and easier



Titan 1/4" EZ-Swivel

- Provides infinite range of motion, allowing spray in hard-to-reach places without binding the hose
- Spray longer, spray smarter, spray better — it's just that EZ



Titan Anti-Spit Valve

- Prevents paint spitting for a consistent, quality finish
- Needle valve design shuts fluid off at the tip
- Optimized for airless spraying with no adjustment required
- Ideal for use with gun extensions and spray poles

HVLP and Fine Finishing

Choosing an HVLP or Fine Finish Sprayer

Answer the following questions to help find the sprayer that’s right for your work — whether you’re painting a room or finishing furniture.

What are your productivity needs?



Sprayers in this category range from light duty to high production work.

- **High Volume Low Pressure (HVLP) sprayers** are designed for small detailed work that requires the highest-quality finish.
- **Air-Assisted Fine Finishing sprayers** are designed for larger jobs that demand a high-quality finish.

Light Duty	HVLP
Medium Duty	HVLP
Heavy Duty	HVLP
High Production	Air-Assisted Fine Finishing

What type of paint do you spray?



Not all HVLP sprayers are equipped to handle thick latex paint because of their lower pressure.

ALL HVLP/Fine Finishing sprayers can be used



Stains



Lacquers



Alkyds



Latex based

Verify the capabilities of your model



HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Medium			Heavy
				
MODEL	TITAN FlexSpray™ Pro 18V	TITAN Capspray® X 80	GRACO FinishPro™ HVLP 7.0	TITAN Capspray® X 95
Sales Number	1030-76840	1028-86066	ProContractor 1012-94684	1041-58878
Motor	1 Stage Turbine	1 Stage Turbine	3 Stage Turbine	4 Stage Turbine
Maximum Atomization Pressure (PSI)	4.50	8.00	7.00	9.50
CFM	N/A	N/A	N/A	N/A
Weight	4.3 Lbs.	12 Lbs.	18 Lbs.	22.5 Lbs.
Cart	N/A	N/A	N/A	Power Cart Accessory
Available Models* (See below for model description)	D	A	A	A
Cup/Pot Capacity	1 Qt. Cup	1 Qt. Cup with Rotating Pick-Up Tube	1 Qt. FlexLiner™ Cup	1 Qt. CapLiner™ System
Compressor	Not Required	Not Required for 2 Qt. Remote	N/A	Not Required for 2 Qt. Remote
Stains, Lacquers	☑	☑	☑	☑
Alkyd-Based Paints	☑	☑	☑	☑
Latex-Based Paints	☑	☑	☑	☑
CETL Certified	☑	☑	☑	☑

* Model description

A Complete units include gun, hose and cup/pot

B ProContractor Series includes Edge® II Plus Gun, Smart Start™, TurboControl, Dual Air Filtration, Utility Box, Super-Flex™ Hose and FlexLiner™ Bag System

C ProComp Series includes all ProContractor Series features plus: 2-Quart Remote Cup, On-Board Air Compressor, Air Hose and Material Hose

D Includes FlexFinish and Fine Finish Front Ends, 1-Quart Cup, Tool Bag, 2 – 18V 4 Ah AMPShare by Bosch Batteries with Charger

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

High Production		
		
GRACO FinishPro™ HVLP 9.0	GRACO FinishPro™ HVLP 9.5	TITAN Capspray® X 105
ProContractor 1012-94692	ProContractor 1012-94700 ProComp 1012-94718	1041-58886
4 Stage Turbine	5 Stage Turbine	5 Stage Turbine
9.00	9.50	10.50
N/A	N/A	N/A
24 Lbs.	26 Lbs. (ProContractor Series)	23.5 Lbs.
N/A	N/A	Power Cart Accessory
B	A, B, C	A
1 Qt. FlexLiner™ Cup	1 Qt. FlexLiner™ Cup	1 Qt. CapLiner™ System
N/A	ProComp – Yes	Not Required for 2 Qt. Remote
☑	☑	☑
☑	☑	☑
☑	☑	☑
☑	☑	☑

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	High Production			
				
MODEL	TITAN Capspray® X 115	TITAN ED655 Plus	GRACO FinishPro™ GX 19 Airless	GRACO FinishPro™ GX 19 Airless Cordless
Sales Number	1041-58894	868-8244	1006-65009	1025-32686
Motor	6 Stage Turbine (Variable Speed)	1/2 HP, TEFC	1/2 HP DC	1/2 HP Brushless DC
Maximum Atomization Pressure (PSI)	11.50	2800 .33 GPM/ .017 Airless Tip Size	3000 .38 GPM/ .019 Airless Tip Size	3000 .38 GPM/ .019 Airless Tip Size
CFM	N/A	N/A	N/A	N/A
Weight	24 Lbs.	27 Lbs.	31 Lbs.	29 Lbs.
Cart	Power Cart Accessory	N/A	Stand	Stand
Available Models* (See below for model description)	A	A	B	C
Cup/Pot Capacity	1 Qt. CapLiner™ System	1.5 Gal. Hopper	1.5 Gal. Hopper	1.5 Gal. Hopper
Compressor	Not Required for 2 Qt. Remote	N/A	N/A	N/A
Stains, Lacquers	✓	✓	✓	✓
Alkyd-Based Paints	✓	✓	✓	✓
Latex-Based Paints	✓	✓	✓	✓
CETL Certified	✓	✓	✓	✓

*Model description


A Complete units include gun, hose and cup/pot

B Complete unit includes gun, hose and Fine Finish Low Pressure SwitchTip

C Complete unit includes Contractor PC™ Compact gun, hose, Fine Finish Low Pressure SwitchTip, (2) DeWALT 60VMAX FlexVolt 6.0 Ah Batteries and Fan-Cooled Fast Charger

HVLP and Fine Finishing

Sherwin-Williams carries a complete line of accessories. See store for details.

Air-Assisted Fine Finishing			
			
TITAN AirCoat	GRACO FinishPro™ 395 PC	TITAN MultiFinish™ 440	GRACO FinishPro™ 595 PC
220-7660	1005-55622	573-4066	1017-97249
1/2 HP, TEFC	7/8 HP TEFC DC	7/8 HP DCX	1.6 HP MaxPower™ Brushless DC
2800 .35 GPM/ .017 Airless/ .017 Air-Assisted Tip Size	3300 .47 GPM/ .023 Airless	3300 .54 GPM/ .023 Airless/.023 Air-Assisted Tip Size	3300 0.7 GPM/ .027 Airless
3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI	3.2 @ 35 PSI
56 Lbs.	107 Lbs.	92 Lbs.	108 Lbs.
N/A	Hi-Boy	High Rider	Hi-Boy
A	B	A	B
1.5 Gal. Hopper	1 or 5 Gal. Direct Immersion	1 and 5 Gal. Suction Set	1 or 5 Gal. Direct Immersion
5/8 HP	1 HP SmartComp	7/8 HP DCX	1 HP SmartComp
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓

Striping Equipment

Selecting the Right Striping Equipment

Line strippers produce precise lines on surfaces like parking lots, roads and athletic fields. Use this guide to choose equipment to complete your striping job quickly and efficiently.

What application do you need it for?



If you do this type of work...	Choose this type of striping equipment	
Spraying standard materials, like waterborne paint	Line Strippers	See Pages 43 – 47
Removing lines from roads and parking lots	Pavement Specialty Products	See Page 48 – 51
Thermoplastic “hot” applied striping	Specialty Thermoplastic Strippers	See Page 49
Traffic tape applications	Traffic Tape Applicator	See Page 50

Here's why thermoplastic and traffic tapes are becoming the preferred line striping methods for DOTs all around the USA:



Long-lasting lines:
Up to 5 times longer than alternatives



Safe: Retroreflectivity is built into the material



Profit: More profit per foot than most alternative methods



Simple to use:
Short learning curve = long-lasting knowledge for operators

Striping Equipment

What is the size of your typical striping job?



Stripers in this category range from light duty to heavy duty. Choose the right capability to help ensure your machine has enough flow to complete your projects quickly.



Light Duty
Small parking lots (20–30 lines), athletic fields



Medium Duty
Medium parking lots (40–100 lines)




Heavy Duty
Large parking lots (airports, shopping centers), highways

Do you need a striper for indoor use?



When you need your line striper for indoor use, the power source is an important element.

There are two methods for powering a line striper: a gasoline engine or battery.



For **indoor** environments, use a **battery-powered unit**.



For **outdoor** environments, use **gasoline OR battery-powered units**.

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light				
					
MODEL	TITAN SideStriper Pro	GRACO FieldLazer™ ES100	GRACO FieldLazer™ S100	GRACO FieldLazer™ ES100 LineAssist™	TITAN PowrLiner™ 850
Sales Number	1041-58860 Sprayer not included	1041-05770	993-7855	1041-05770	100-1981
Motor	N/A	DeWALT 6.0 Ah FlexVolt Battery Electric Motor	35cc Honda Gas Engine	DeWALT 6.0 Ah FlexVolt Battery Electric Motor	37.7cc 4-Stroke Gas Engine
Gallons Per Minute (GPM)	.31	.50	.50	.50	.33
Supports Tip Size*	.017	.021	.021	.021	.021
Maximum Fluid Pressure (PSI)	1600	900	900	900	3000
Weight	11 Lbs.	75 Lbs.	80 Lbs.	120 Lbs.	65 Lbs.
Pump Type	N/A	Endurance Piston Pump with ProConnect	Piston	Endurance Piston Pump with ProConnect	Piston
Guns Supported	1	1	1	1	1

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers


Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light			
				
MODEL	GRACO ES 500 Stencil	GRACO LineLazer® ES 500	GRACO LineLazer® 3400	GRACO LineLazer® ES 3400
Sales Number	1025-37388	1025-34633	1012-94742	1041-05762
Motor	DeWALT 6.0 Ah FlexVolt Battery Electric Motor	DeWALT 9.0 Ah FlexVolt Battery Electric Motor	120cc Honda Gas Engine	DeWALT 9.0 Ah FlexVolt Battery Electric Motor
Gallons Per Minute (GPM)	.47	.47	.75	.75
Supports Tip Size*	.021	.021	.027	.027
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	31 Lbs.	120 Lbs.	160 Lbs.	130 Lbs.
Pump Type	Endurance Piston Pump with ProConnect	Endurance Piston Pump with ProConnect	Endurance Piston Pump	Endurance Piston Pump with ProConnect
Guns Supported	1	1	1	1

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

Light		Medium		
				
TITAN PowrLiner™ 3500	TITAN PowrLiner™ 3500 72V	GRACO LineLazer® V ES 2000 Lithium	TITAN PowrLiner™ 4955	GRACO LineLazer® V 3900
1-Gun 1013-13542 With Stencil Kit 1025-37313	1 Battery 1028-39040 2 Batteries 1028-39057	2-Gun (Mechanical) 1025-37412 HP Automatic Series Available 2-Gun (2 Automatic) 1025-35341	2-Gun 1005-56190	2-Gun (Mechanical) 1006-64812 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64820 2-Gun (2 Automatic) 1006-64838 LineDriver Models Available LDHD-160-6110 LD-160-6102
120cc Honda	72V Honda eGX Battery	2.2 HP Brushless DC 2 Lithium Batteries	120cc Honda	120cc Honda GX Gas Engine
.75	.75	1.10	1.25	1.25
.027	.027	.033	.034	.036
3300	3300	3300	3300	3300
192 Lbs.	200 Lbs.	350 Lbs.	324 Lbs.	230 Lbs.
PermaStroke Sealed Hydraulic	PermaStroke Sealed Hydraulic	Endurance Piston Pump	Hydraulic Piston	Endurance Piston Pump
1	1	2 (.025 Tip)	2 (.025 Tip)	2 (.025 Tip)

Line Stripers


Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Medium		Heavy	
				
MODEL	TITAN PowrLiner™ 5500	GRACO LineLazer® 130HS	GRACO LineLazer® V 5900	GRACO LineLazer™ V 200HS
Sales Number	2-Gun with SmartArm 1032-52466	2-Gun 599-4918 LineDriver Models Available LDHD-160-6110 LD-160-6102	2-Gun (Mechanical) 1006-64846 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64853 2-Gun (2 Automatic) 1006-64861 LineDriver Models Available LDHD-160-6110 LD-160-6102	Standard Series 1006-64879 HP Automatic Series Available 2-Gun (1 Mechanical, 1 Automatic) 1006-64887 2-Gun (2 Automatic) 1006-64895 LineDriver Models Available LDHD-160-6110 LD-160-6102 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64903
Motor	160cc Honda GX	120cc Honda GX Gas Engine	120cc Honda GX Gas Engine	200cc Honda GX Gas Engine
Gallons Per Minute (GPM)	1.25	1.30	1.60	2.15
Supports Tip Size*	.036	.037	.043	.047
Maximum Fluid Pressure (PSI)	3300	3300	3300	3300
Weight	227 Lbs.	260 Lbs.	250 Lbs.	277 Lbs.
Pump Type	PermaStroke Sealed Hydraulic	Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump
Guns Supported	2 (.025 Tip)	2 (.027 Tip)	2 (.029 Tip)	2 (.034 Tip)

*Number of guns, tip size, hose length and hose diameter affect fluid pressure

Line Stripers

Sherwin-Williams carries a complete line of accessories. See store for details.

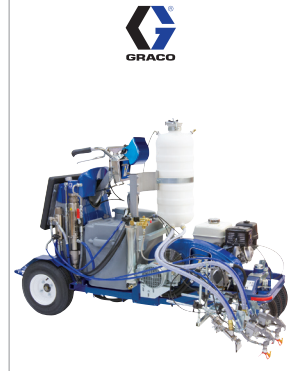Heavy				
				
GRACO LineLazer™ V 200DC	GRACO LineLazer™ V 250SPS	GRACO LineLazer™ V 250DC	TITAN PowrLiner™ 6955	TITAN PowrLiner™ 8955
Standard Series 1017-97751 HP Automatic Series Available 2-Gun (Automatic) 1017-97769 HP Reflective Series Available 2-Gun 1 Pressurized Bead Tank Installed 1017-97777	HP Automatic Series Available 1006-64911 HP Reflective Series Available 2-Gun (2 Automatic) 1 Pressurized Bead Tank Installed 1006-64937 2-Gun (2 Automatic) 2 Pressurized Bead Tanks Installed 1006-64929	HP Automatic Series Available 2-Gun (2 Automatic) 1006-64945 3-Gun (3 Automatic) 1006-64952 HP Reflective Series Available 2-Gun (2 Automatic) 2 Pressurized Bead Tanks Installed 1006-64960 3-Gun (3 Automatic) 2 Pressurized Bead Tanks Installed 1006-64978	2-Gun 1005-56208	2-Gun 1005-56216
200cc Honda GX Gas Engine	390cc Honda GX Gas Engine	390cc Honda GX Gas Engine	160cc Honda Electric Start	200cc Honda Electric Start
2.15	2.50	2.50	2.10	2.50
.047	.055	.055	.047	.054
3300	3300	3300	3300	3300
340 Lbs.	600 Lbs.	864 Lbs.	339 Lbs.	339 Lbs.
Endurance Piston Pump	Endurance Piston Pump	Endurance Piston Pump	Hydraulic Piston	Hydraulic Piston
2 (.034 Tip)	2 (.039 Tip)	5 (.021 Tip)	2 (.031 Tip)	2 (.038 Tip)

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Ride-On Attachment					
	 	 	 	 	 	 
MODEL	GRACO LineDriver®	TITAN LazyLiner™ Pro	TITAN LazyLiner™ Elite	GRACO LineDriver® HD	GRACO LineDriver® HD with Elec- tric Start	GRACO LineDriver® ES Lithium
Sales Number	160-6102	1021-77813	1026-91086	160-6110	1025-33510	1025-37057
Operating Speed	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 12 mph (19 km/h); Reverse up to 7 mph (11 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)	Forward up to 10 mph (16 km/h); Reverse up to 6 mph (10 km/h)
Fuel Capacity	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	.95 Gal. (3.6 L)	3 Lithium Batteries (10- Hour Run Time)
Motor	160cc Honda GX Gas Engine	160cc Honda Gas Engine	200cc Honda Gas Engine	200cc Honda GX Gas Engine	203cc Vanguard	Lithium Battery-Powered Motor
Engine Starting System	Manual Pull	Manual Start	Electric Start	ProStart System	Electric Start	Auto Start
Tires	Tubeless Pneumatic 16" L x 4" W	16" L x 4.5" W	16" L x 6.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W	Tubeless Pneumatic 16" L x 5.5" W
Weight	265 Lbs.	260 Lbs.	280 Lbs.	275 Lbs.	280 Lbs.	355 Lbs.

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Thermoplastic Striper		
	 	 	 
MODEL	GRACO ThermoLazer™ 200TC	GRACO ThermoLazer™ 300TC	GRACO ThermoLazer™ ProMelt™
Sales Number	1004-30073	569-6307	938-9909
Exterior Construction	Steel	Aluminum	Aluminum
Fuel Source	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.	LP Gas, 20 Lbs.
Main Burners	Single Burner/ 30,000 BTU	Twin Burner/ 30,000 BTU	Twin Burner/ 100,000 BTU
Temperature Control	Thermostat	Thermostat	Thermostat
Die Heater	Direct Burners	Direct Burners	Direct Burners
Direction Control	Locking Rear Caster	Locking Front Swivel Wheel	Locking Front Swivel Wheel
Bead Dispenser	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available	No-Tool Variable Width and Flow Rate Double Drop Kit Available
Bead Reservoir	40 Lbs. (18 kg)	90 Lbs. (40 kg)	90 Lbs. (40 kg)
Weight	260 Lbs. (118 kg)	295 Lbs. (133 kg)	345 Lbs. (157 kg)
Material Capacity	200 Lbs. (91 kg)	300 Lbs. (136 kg)	300 Lbs. (136 kg)
Melt Time (300 Lbs.)	Up to 2.5 Hours	Up to 4.5 Hours	1 to 1.5 Hours
Temperature Limit Control	N/A	N/A	475° Switch

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Traffic Tape Applicator
	
MODEL	GRACO TapeLazer™ HP Automatic
Sales Number	1023-51897
Motor	160cc Honda Gas Engine
Operating Speed	6 mph (10 km/h)
Max. Tape Width	14"
Tape Type	Permanent & Temporary
Cutting	Push Button
Weight	500 Lbs.

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Line Removal			
				
MODEL	GRACO GrindLazer™ Standard DC89 G	GRACO GrindLazer™ PRO DC89 G	GRACO GrindLazer™ HP DC1013 G	GRACO GrindLazer™ HP DC1021 G DCS
Sales Number	1016-98157	1017-97785	1017-97819	1017-97827
Max Working Width	8" (20 cm)	8" (20 cm)	10" (25 cm)	10" (25 cm)
Engine	270cc Honda GX Gas Engine	270cc Honda GX Gas Engine	390cc Honda GX Gas Engine	21 HP Vanguard Gas Engine
Engine Start	Pull Start	Pull Start	Pull Start	Electric Start
Rear Tires	Solid Rubber	Solid Rubber	Pneumatic Air Filled	Pneumatic Air Filled
Front Tire	Solid Rubber	Solid Rubber	Pneumatic Air Filled, Swivel	Pneumatic Air Filled, Swivel
Drive Belt	Triple Drive Belt	Heavy-Duty HTD Belt	3-Cog Belt	3-Cog Belt
Cut Direction	Forward	Forward	Forward	Reverse
Cut Depth Adjustment	Manual Lever	Manual Dial	Manual Dial	Electronic
Weight	160 Lbs. (73 kg)	190 Lbs. (86 kg)	310 Lbs. (141 kg)	360 Lbs. (163 kg)
LineDriver®	No	No	Option	Required
Applications	Light Traffic Marking Removal, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Traffic Paint, Thermoplastic, Epoxy, Trip Hazards	Inlay Grooving, Traffic Paint, Thermoplastic, Epoxy
Removal Rate	Walking – 400 Sq. Ft./Hr.	Walking – 400 Sq. Ft./Hr.	Walking – 800 Sq. Ft./Hr. LineDriver® – 1,700 Sq. Ft./Hr.	LineDriver® – 2,100 Sq. Ft./Hr.

Pressure Washers

Choosing a Pressure Washer

Whether you're preparing a surface to be painted or giving it a serious cleaning, a pressure washer will get the job done. Consider the following questions to help select the washer that best meets your needs.

How many hours per week will you use it?




There are two types of pressure washer pumps: belt drive and direct drive pumps. Your choice will largely depend on your weekly usage.

If your usage is...	Consider this type of pressure washer	
Less than 30 hours per week	Direct drive	See Pages 54 – 55
30+ hours per week	Belt drive	See Pages 56 – 57

How much cleaning power will you need?



CUs are a useful measurement for comparing models. The higher the number of cleaning units, the more cleaning power your pressure washer has — which ultimately means less cleaning time.

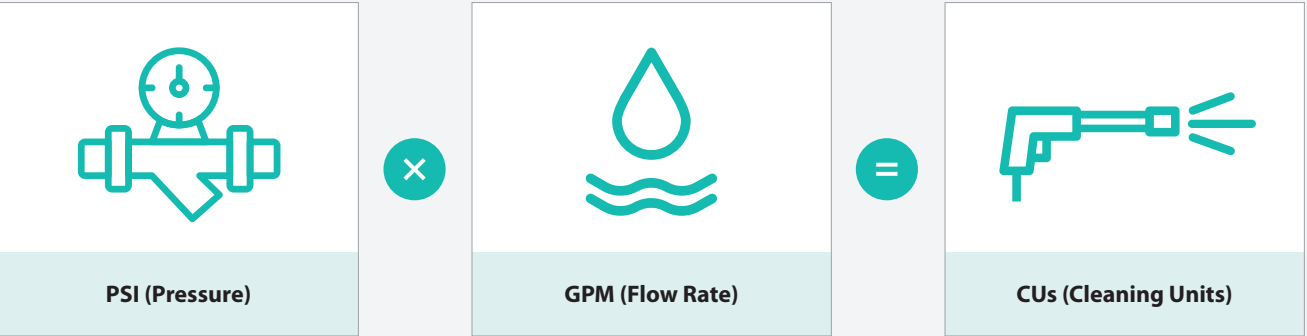

Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Water Temperature and Usage	Cold (10–20 Hrs./Week)				
	Cold (20–30 Hrs./Week)				
	 	 	 	 	 
MODEL	MI-T-M ChoreMaster® 3200	MI-T-M Work Pro® 3200	MI-T-M ChoreMaster® 4200	MI-T-M Work Pro® 4200	MI-T-M Job Pro® 3000
Sales Number	6509-90369	6509-90450	6509-90435	6509-90468	1000-79094
Maximum (PSI)	3200	3200	4200	4200	3000
Gallons Per Minute (GPM)	2.40	2.40	3.40	3.40	3.00
Usage	10–15 Hrs./Week	15–20 Hrs./Week	10-15 Hrs./Week	15-20 Hrs./Week	20–30 Hrs./Week
Pump Manufacturer	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	Mi-T-M Pump	AR Pump
Engine	212cc Mi-T-M OHV	196cc Honda OHV	420cc Mi-T-M OHV	389cc Honda OHV	270cc Honda OHV
Cleaning Units (CUs) (PSI x GPM)	7680 CUs	7680 CUs	14280 CUs	14280 CUs	9000 CUs
Net Weight	85 Lbs.	85 Lbs.	142 Lbs.	142 Lbs.	105 Lbs.
Frame	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum
Pressure Relief Start	✔	✔	✔	✔	✔

Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.

Direct Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (20–30 Hrs./Week)					Hot (20–30 Hrs./Week)
 	 	 	 	 	 
MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000	MI-T-M HSP 3500
6512-64087	1024-97492	6511-57224	1000-76728	1020-51133	906-9782
4000	4000	4000	4000	4000	3500
3.50	4.00	3.50	4.00	4.00	3.30
20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week	20–30 Hrs./Week
AR Pump	General Pump with External Bypass Unloader	AR Pump	General Pump with External Bypass Unloader	CAT Pump with External Bypass Unloader	AR Pump with External Bypass
420cc Mi-T-M OHV	420cc Mi-T-M OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV	389cc Honda OHV
14000 CUs	16000 CUs	14000 CUs	16000 CUs	16000 CUs	11550 CUs
125 Lbs.	125 Lbs.	125 Lbs.	128 Lbs.	125 Lbs.	428 Lbs.
Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Lightweight Aluminum	Powder Coated Steel
✔	✔	✔	✔	✔	—

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Water Temperature and Usage	Hot (40+ Hrs./Week)	Cold (10-15 Hrs./Week)	Cold (30-40 Hrs./Week)	
				
MODEL	MI-T-M HS 3500	MI-T-M ChoreMaster® 4000	MI-T-M Job Pro® 4000	MI-T-M Job Pro® 4000
Sales Number	599-4983	916-2157	1024-97500	1000-76751
Maximum (PSI)	3500	4000	4000	4000
Gallons Per Minute (GPM)	5.60	3.40	4.00	4.00
Usage	40+ Hrs./Week	10-15 Hrs./Week	30-40 Hrs./Week	30-40 Hrs./Week
Pump Manufacturer	General Pump with External Bypass	AR Pump	General Pump with External Bypass	General Pump with External Bypass
Engine	688cc Honda OHV Electric Start	420cc Mi-T-M OHV	420cc Mi-T-M OHV	389cc Honda OHV
Cleaning Units (CUs) (PSI x GPM)	19600 CUs	13600 CUs	16000 CUs	16000 CUs
Net Weight	760 Lbs.	195 Lbs.	165 Lbs.	165 Lbs.
Frame	Powder Coated Steel	Powder Coated Steel	Lightweight Aluminum	Lightweight Aluminum
Pressure Relief Start	—	✓	✓	✓

Pressure Washer Rental Program

Sherwin-Williams offers a pressure washer rental program in select stores. The rental unit is a Mi-T-M cold water, direct drive 2700 PSI pressure washer powered by a 196cc Honda engine. The pressure washer can be rented for a half day or full day at competitive rates.

Belt Drive Pressure Washers

Sherwin-Williams carries a complete line of accessories. See store for details.

Cold (30-40 Hrs./Week)	Cold (40+ Hrs./Week)			
				
MI-T-M Job Pro® 4000	MI-T-M Premium 5000	MI-T-M Premium 5000	MI-T-M Premium 6000	MI-T-M Premium 7000
1020-51141	1000-76777	1000-76785	1000-76801	1007-14286
4000	5000	5000	6000	7000
3.70	4.00	4.00	3.70	3.80
30-40 Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week	40+ Hrs./Week
CAT Pump with External Bypass Unloader	AR Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass	General Pump with External Bypass
389cc Honda OHV	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start	688cc Honda OHV Electric Start
14800 CUs	20000 CUs	20000 CUs	22200 CUs	26600 CUs
156 Lbs.	433 Lbs.	449 Lbs.	449 Lbs.	449 Lbs.
Lightweight Aluminum	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel	Powder Coated Steel
✓	—	—	—	—

Texture Sprayers and Air Compressors

Choosing a Texture Sprayer

Texture finishing continues to grow in popularity. From interior knock-down to exterior finishing, the right equipment will make you more productive.

What materials are you spraying?




Texture sprayers are a great example of the amazing things you can accomplish with a coating. From simulated acoustics to textured elastomerics, the material you are spraying will play a large part in the equipment you choose.



Decorative Interior Texture



Exterior Textured Acrylics and Elastomerics

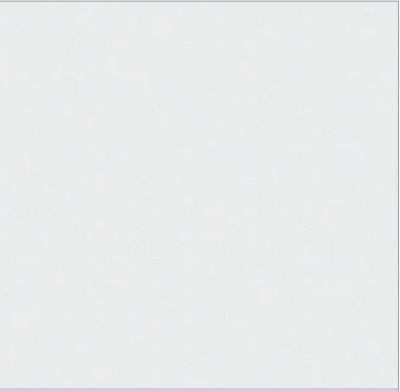

Skim Coat and Level 5

What are your productivity requirements?



Find equipment for everything from small touch-ups to large commercial jobs. Once you've chosen the appropriate material, narrow your selection based on light, medium and heavy-duty production needs.

Light Duty	▶ Small touch-ups
Medium Duty	▶ Regular use over larger areas
Heavy Duty	▶ Heavy-duty production jobs

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Light			
				
MODEL	WAGNER PowerTex®	WAL-BOARD TOOLS Spray-Pro® Hopper Gun	GRACO TexSpray™ FastFinish Pro Texture Spray System	GRACO TexSpray™ FastFinish Standard Texture Spray System
Sales Number	120-0336	125-0679	1015-61660	1015-61678
Maximum (PSI)	4	Based on External Compressor	60	60
Gallons Per Minute (GPM)	Based on Material	Based on External Compressor	Based on Material	Based on Material
Maximum Hose Length	N/A	N/A	150 Ft.	150 Ft.
Motor	1 Stage Turbine	N/A	120V 9 SCFM @ 40 PSI Integrated Air Compressor	120V 9 SCFM @ 40 PSI Integrated Air Compressor
Weight	5.5 Lbs.	4.0 Lbs.	68 Lbs.	68 Lbs.
Materials Sprayed	Simulated Acoustics and Drywall Mud	Simulated Acoustics and Drywall Mud	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings
Typical Applications	Small Area and Touch-up Applications	Small Area and Touch-up Applications	Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors
CETL Certified	☑	—	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Light		
		
GRACO TexSpray™ FastFinish Pressurized Hopper Gun	GRACO TexSpray™ G-Tex Gravity Fed Hopper Gun	GRACO TexSpray™ RTX™ 1400SI
1015-61694	1015-61702	1006-65017
100	100	70
Based on Material	Based on Material	1.40
N/A	N/A	25 Ft.
N/A	N/A	1.7 HP AC
4 Lbs.	4 Lbs.	63 Lbs.
Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Drywall Mud, Textured Acrylics, Synthetic Stucco and Deck Coatings	Simulated Acoustics, Acrylics and Drywall Mud
Residential, Commercial Interiors and Exteriors	Residential, Commercial Interiors and Exteriors	Residential and Light Commercial Interiors
—	—	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy		
			
MODEL	GRACO Mark IV HD 3-in-1	TITAN Impact® 1040T	GRACO Mark IV XT™ HD 3-in-1
Sales Number	Standard 1017-97389	1020-62668	Standard 1029-06179 ProContractor 1029-06187
Maximum (PSI)	3300	3300	3300
Gallons Per Minute (GPM)	1.10	1.15	1.20
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.
Motor	2.2 HP Brushless DC	2.5 HP Duralife Brushless DC	2.3 HP Xtreme Torque Brushless DC
Weight	108 Lbs.	107 Lbs.	103 Lbs. (Hi-Boy)
Materials Sprayed	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Epoxies, Drywall Mud, Intumescent Fireproofing and Other High Build Materials
Typical Applications	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors
CETL Certified	☑	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy				
				
GRACO Mark V HD 3-in-1	GRACO Mark V XT™ HD 3-in-1	GRACO Mark XV™	GRACO GMAX II 5900 HD 3-in-1	
Standard 1017-97405	Standard 1029-06195 ProContractor 1029-06203	Standard 1041-43433 ProContractor 1041-43441	Standard 1017-97629 ProContractor 1017-97645	
3300	3300	3300	3300	
1.35	1.50	2.80	1.60	
300 Ft.	300 Ft.	300 Ft.	300 Ft.	
2.8 HP MaxPower Brushless DC	2.9 HP Xtreme Torque Brushless DC	4.1 HP Xtreme Torque Brushless DC	200cc Honda	
135 Lbs.	126 Lbs. (Hi-Boy)	140 Lbs.	147 Lbs.	
Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Epoxies, Drywall Mud, Intumescent Fireproofing and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Drywall Mud, Silicones, Epoxies, Vapor Barriers and Intumescent	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	
Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential and Commercial Interiors and Exteriors	
☑	☑	☑	—	

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy			
				
MODEL	GRACO TexSpray™ RTX™ 2500PI	GRACO TexSpray™ RTX™ 5000PI	GRACO TexSpray™ RTX™ 5000PX	GRACO TexSpray™ RTX™ 5500PX
Sales Number	1015-60290	1006-65033	1006-65041	1006-65058
Maximum (PSI)	100	100	100	100
Gallons Per Minute (GPM)	2.50	5.00	5.00	5.50
Maximum Hose Length	75 Ft.	100 Ft.	100 Ft.	100 Ft.
Motor	1.7 HP AC	2.0 HP Brushless DC	2.0 HP Brushless DC	2.0 HP Brushless DC 240 Volts
Weight	72 Lbs.	159 Lbs.	163 Lbs.	163 Lbs.
Materials Sprayed	Simulated Acoustics, Acrylics and Drywall Mud	Simulated Acoustics, Acrylics and Drywall Mud, Elastomerics, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomerics, Deck Coatings, Synthetic Stuccos	Simulated Acoustics, Acrylics and Drywall Mud, Elastomerics, Deck Coatings, Synthetic Stuccos
Typical Applications	Residential and Light Commercial Interiors	Residential and Commercial Interiors	Residential and Commercial Interiors and Exteriors	Residential and Commercial Interiors and Exteriors
CETL Certified	☑	☑	☑	☑

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Heavy		
		
GRACO Mark X HD 3-in-1	GRACO GMAX II 7900 HD 3-in-1	GRACO King E-Max XT 40
Standard 1017-97454 ProContractor 1017-97462	Standard 1017-97652 ProContractor 1017-97660 IronMan 1017-97678	1033-98806
3300	3300	4000
2.10	2.20	4.0
300 Ft.	300 Ft.	300 Ft.
4.0 HP Brushless DC 240 Volts	200cc Honda	Xtreme Torque 8 HP Brushless DC
142 Lbs.	159 Lbs.	340 Lbs.
Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials
Medium to Large Residential and Commercial Interiors and Exteriors	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial
☑	—	—

Texture Sprayers

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Heavy			
				
MODEL	GRACO DutyMax GH 230 HD 3-in-1	GRACO DutyMax GH 300 HD 3-in-1	GRACO TexSpray™ HTX™ 2030	GRACO TexSpray™ T-MAX 6912
Sales Number	Standard 1005-55861 ProContractor 1005-55879	Standard 1005-55887 ProContractor 1005-55895	570-9472 573-1971 with High Pressure 3300 PSI Paint Pump Kit	1018-93949 50 Ft. Assisted w/ STX Gun and Hopper 1018-92115 50 Ft. Airless w/ Lance Gun and Hopper 1019-34990 100 Ft. Air-Assisted w/ STX Gun and Hopper 1019-35096 100 Ft. Air-Assisted w/ STX Gun, Mixer and Hopper
Maximum (PSI)	3300	3300	1000	1000
Gallons Per Minute (GPM)	2.35	3.00	3.00	3.20
Maximum Hose Length	300 Ft.	300 Ft.	300 Ft.	200 Ft.
Motor	200cc Honda	270cc Honda	200cc Honda	2.0 HP Brushless DC
Weight	168 Lbs.	218 Lbs.	150 Lbs.	156 Lbs.
Materials Sprayed	Oil-Based Coatings, Enamels, Latex Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Oil-Based Coatings, Enamels, Latex, Block Fillers, Elastomerics, Epoxies, Drywall Mud and Other High Build Materials	Smooth to Heavily Aggregated Textures with Silica Sand, Perlite, Vermiculite, Polystyrene, in Smooth, Medium and Extra Coarse Grades	Simulated Acoustic, Orange Peel, Splatter, Knockdown, Smooth, Level 5, Skim Coat, Textured Acrylics and Elastomerics, EIFS, Synthetic Stucco Finish Coats, Deck Coatings
Typical Applications	Medium to Large Residential, Commercial Interiors, Exteriors and Industrial	Heavy-Duty Residential and Commercial Interiors and Exteriors	Heavy-Duty Residential and Commercial Interiors and Exteriors	Residential, Commercial and Industrial Interiors and Exteriors
CETL Certified	—	 With Optional Electric Conversion Kit	—	—

Standard Series Sprayers include:
Complete gun, hose and tip

ProContractor Series Sprayers include:
Endurance MaxLife pump, ProConnect, QuikReel,
Crush Proof Rock Catcher, gun, hose and tip

IronMan Series Sprayers include:
Endurance MaxLife EXTREME pump, ProConnect,
Flatproof Tires, Crush Proof Rock Catcher, gun,
hose and tip

Air Compressors

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Air Compressors			
				
MODEL	MI-T-M AM1-PE15-08M	MI-T-M AM1-PH65-08M	MI-T-M AM2-PH09-08M	MI-T-M ACS-23105-80VM
Sales Number	569-7453	964-4246	158-7765	924-3734
CFM	7.3 @ 90 PSI	13.9 @ 90 PSI	17.2 @ 175 PSI	18 @ 175 PSI
Horsepower	1.50	6.50	9.00	5.00
Motor & Engine	120V/13.2A Electric	196cc Honda OHV	270cc Honda OHV	230V/23.0A Single Phase
Receiving Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	8 Gallon Twin Tank	80 Gallon Stationary
Stage	Single	Single	Two	Two
Net Weight	170 Lbs.	175 Lbs.	260 Lbs.	589 Lbs.

Ladders

Choosing a Ladder




Werner has simplified the ladder selection process. This new system links product, packaging and merchandising, making ladder selection as easy as 1, 2, 3.

Step 1: Select Height



To ensure you choose the ladder best suited to your needs, follow the Werner height safety chart as shown below:

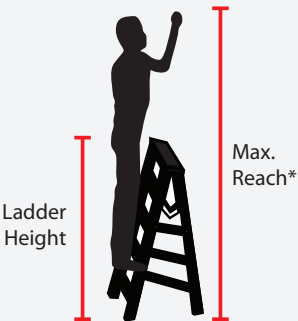


Ladder Height	Max. Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'




Ladder Height	Max. Reach*	Height to Gutter or Top Support Point†
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

Average Home Heights

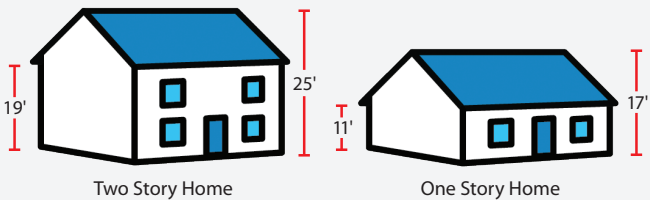


Support Points

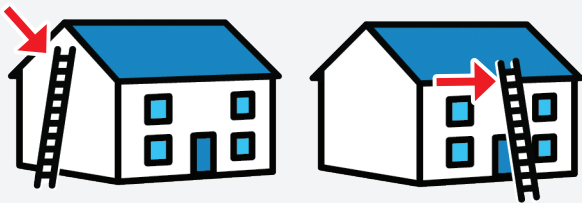

*Assumes a 5'6" person with a vertical 12" reach.
†Support points for extension ladders reflect section overlap, ladder angle, and 3' extension above roof line.

Step 2: Select Performance

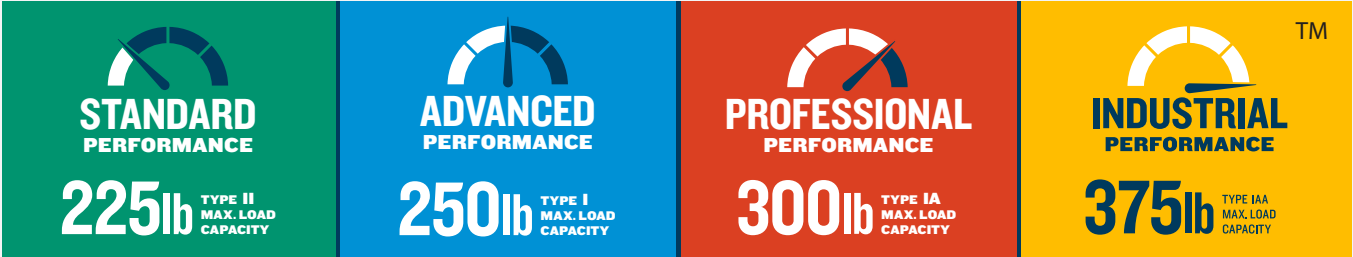

Combined Weight of User and Materials.

Approximate Material Weights			
Bundle of shingles	70 Lbs.	3 x 4 window	80 Lbs.
5 gallons of roof coating	70 Lbs.	Garage door opener	40 Lbs.
5 gallons of paint	60 Lbs.	Basketball hoop	60 Lbs.
Tool box with tools	35 Lbs.	Sheet of plywood	80 Lbs.
Portable sprayer	20 Lbs.	(3) 4 x 4s	80 Lbs.
Ceiling fan	30 Lbs.		

Step 3: Select Type



Fiberglass 	• Strength – 7-layer construction • Safety – For use around electricity • Durability – Corrosion resistant • Pro preferred • Non-conductive side rails	Aluminum 	• Lightweight • Not for use around electricity • Corrosion resistant
-----------------------	---	---------------------	--

Sherwin-Williams carries a complete line of accessories. See store for details.



Model 6006



Model 5904



Model D6224-2



Model I-CISC



Model VR401-W



Model I-MCNT



Model AP-2030-MP3

SW Sales Number	Model Number	Description
FIBERGLASS LADDERS		
Load Capacity 225 Lbs. Type II		
400-2473	5904	4' Step Ladder
Load Capacity 250 Lbs. Type I		
610-9870	6004	4' Step Ladder
610-9979	6006	6' Step Ladder
447-7121	6008	8' Step Ladder
Load Capacity 300 Lbs. Type IA		
455-7781	6204	4' Step Ladder
403-5101	6206	6' Step Ladder
611-7923	6208	8' Step Ladder
611-7816	6210	10' Step Ladder
400-2440	6212	12' Step Ladder
280-2783	D6224-2	24' Extension Ladder
400-0477	D6228-2	28' Extension Ladder
400-2317	D6232-2	32' Extension Ladder
PLANKS, SCAFFOLDS, OUTRIGGERS		
282-4431	PA208	Aluminum Ext. Plank 8'
611-7840	PA210	Aluminum Ext. Plank 10'
6513-15160	AP-2030-MP3	Adjustable Work Platform
1017-71244	I-CISC	6' Baker Utility Scaffold
1017-71137	I-IMCNT	4' Mini Folding Platform
TRUCK AND VAN RACKS		
916-1936	TR401-S	Removable Steel Truck Rack
916-1944	VR401-W	Steel Van Rack
MERCHANDISING DISPLAY		
164-4616	37	Werner Small Ladder Rack #37 Order Through ORDER EXPRESS
ACCESSORIES		
282-5479	AC10-20-02	Long Body Ladder Jack
796-8381	AC19-2	Extension Ladder Cover Kit
468-8081	AC78	Quickclick Stabilizer
1032-83511	PK100	LevelSafe Pro Self Leveling
435-9022	76-2	Pail Shelf

Sherwin-Williams carries a complete line of accessories. See store for details.



SW Sales Number	Werner Model Number	Description
ALUMINUM LADDERS		
Load Capacity 225 Lbs. Type II		
611-7998	D1216-2	16' Extension Ladder
282-2286	D1220-2	20' Extension Ladder
139-1309	D1224-2AC96	24' Ext. Ladder w/Stabilizer
282-2302	D1228-2	28' Extension Ladder
611-8012	D1232-2	32' Extension Ladder
611-8020	D1240-2	40' Extension Ladder
3-Section 225 Lbs. Type II		
116-6917	D1224-3	24' 3-section Ext. Ladder
Load Capacity 225 Lbs. Type II w/Leveler		
234-7805	D1716-2EQ	16' Ext. Ladder w/Leveler
165-0704	D1724-2EQ	24' Ext. Ladder w/Leveler
Load Capacity 250 Lbs. Type I		
282-2195	366	6' Step Ladder
403-7966	D1316-2	16' Extension Ladder
403-7784	D1320-2	20' Extension Ladder
403-7917	D1324-2	24' Extension Ladder
403-7867	D1328-2	28' Extension Ladder
403-7941	D1332-2	32' Extension Ladder
404-5795	D1340-2	40' Extension Ladder
Load Capacity 300 Lbs. Type IA		
163-9087	150B	2' Step Ladder
400-4107	374	4' Step Ladder
282-2211	376	6' Step Ladder
282-2229	378	8' Step Ladder
400-2424	310	10' Step Ladder
403-4849	D1516-2	16' Extension Ladder
611-8038	D1520-2	20' Extension Ladder
282-5123	D1524-2	24' Extension Ladder
611-8046	D1528-2	28' Extension Ladder
282-2310	D1532-2	32' Extension Ladder
282-2336	D1540-2	40' Extension Ladder
6513-36794	15.5MSZ1A	15.5' Austram Hardware Extension Ladder
6513-39442	12.5MSZT1A	12.5' Austram Hardware Extension Ladder
MULTI-POSITION LADDERS		
Load Capacity 375 Lbs. Type IAA		
6513-99289	MT-18IAA	18' Multi-Position Ladder



Sherwin-Williams carries a complete line of accessories. See store for details.



S-W SALES NUMBER	MODEL NUMBER	DESCRIPTION
FIBERGLASS STEP LADDERS		
LOAD CAPACITY 300 LB TYPE IA		
6513-92821	E-SLF8T1A	8 FT FIBERGLASS STEP LADDER
LOAD CAPACITY 250 LB TYPE I		
6513-92805	E-SLF4T1	4 FT FIBERGLASS STEP LADDER
6513-92813	E-SLF6T1	6 FT FIBERGLASS STEP LADDER
ALUMINUM STEP LADDER		
LOAD CAPACITY 225 LB TYPE II		
6513-92839	E-SLA6T2	6 FT ALUMINUM STEP LADDER
ALUMINUM EXTENSION LADDERS / ACCESSORY		
LOAD CAPACITY 225 LB TYPE II		
6513-79315	E-ELA20T2	20 FT ALUMINUM EXTENSION LADDER
6513-79364	E-ELA24T2	24 FT ALUMINUM EXTENSION LADDER
6513-79224	E-ACCLECP	END CAP PROTECTORS FOR EXTENSION LADDERS
ALUMINUM STEP STOOL WITH TOOL TRAY		
LOAD CAPACITY 300 LB TYPE IA		
1031-80345	E-SLA3TYW	3-STEPS PRO ALUMINUM STEP STOOL WITH TOOL TRAY
PORTABLE WORK PLATFORM		
1024-31939	E-PWP7000AL	30 IN. PORTABLE WORK PLATFORM
PORTABLE SCAFFOLDINGS		
1017-71244	I-CISC	6 FT BAKER STYLE SCAFFOLD
1017-71137	I-IMCNT	4 FT SCAFFOLD WITH SAFETY RAIL & TOOL SHELF
TELESCOPIC LADDERS		
6513-39442	12.5MSZ1A	12.5 FT TYPE 1A TELESCOPIC
6513-36794	15.5MSZ1A	15.5 FT TYPE 1A TELESCOPIC



Ladders

Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Scaffolding	
		
MODEL	METALTECH 3-Unit Scaffold Tower I-T3CISC	METALTECH Saferstack 2-Story Fixed Scaffold Tower M-MFT5710-A
Sales Number	1017-71384	Leveling Jacks 1017-71335 Casters 1017-71327
Material	Steel	Steel
Load Capacity	1,000 Lbs.	2,500 Lbs.
Features	• Rugged 1-1/2' square tube steel construction with a yellow powder-coat finish • 5' double locking casters and a spring-loaded locking mechanism • Platform adjusts in 2' increments for versatility • Meets OSHA standards • Includes: 3 6' Baker style scaffolds, 3 platforms, 12 heavy-duty casters, 1 guardrail set, 1 set of 46" outriggers	• Interlocking frames for safer storage and transport and takes up 30% less space than regular frames • Anti-slip, blue textured powder-coat finish for superior grip and secure footing • Fully adjustable to level scaffolding on uneven terrain • Meets OSHA standards • Includes: Guardrails, 3 aluminum platforms with 5/8" plywood deck, 8" casters or 24" leveling jacks
Height	18'	10'

Ladders

Sherwin-Williams carries a complete line of accessories. See store for details.

Type	Stilts		
			
MODEL	TOOLPRO Magnesium Alloy Stilts	TOOLPRO Magnesium Alloy Stilts	TOOLPRO Magnesium Alloy Stilts
Sales Number	6513-97465	1030-57782	6513-97473
Material	Magnesium Alloy	Magnesium Alloy	Magnesium Alloy
Load Capacity	225 Lbs.	225 Lbs.	225 Lbs.
Features	At only 13 lbs., these magnesium stilts are the lightest stilts you can buy. They are perfect for any work up high such as drywall, ceiling installations, painting, trim and electrical. They allow you to work without ladders or scaffolds and are the ultimate tool for mobility. • Adjustable height from 18 in. to 30 in. • Rated to 225 lbs. • Adjustable metal buckle straps and heel plates attached • Padded calf braces and dual spring action	At only 14 lbs., these magnesium stilts are the lightest stilts you can buy. These stilts feature our new "Soft Strap" band to ensure comfort without sacrificing efficiency. They are perfect for any work up high such as drywall, ceiling installations, painting, trim and electrical work. They allow you to work without ladders or scaffolds and are the ultimate tool for mobility. All repair parts are available and field replaceable. • Adjustable height from 24 in. to 40 in. • Rated to 225 lbs. • Soft Strap bands to reduce soreness and ensure a smoother use • Heavy duty reinforced rubber soles for long life	At only 14 lbs., these magnesium stilts are the lightest stilts you can buy. These stilts feature our new "Soft Strap" band to ensure comfort without sacrificing efficiency. They are perfect for any work up high such as drywall, ceiling installations, painting, trim and electrical work. They allow you to work without ladders or scaffolds and are the ultimate tool for mobility. • Adjustable height from 48 in. to 64 in. • Rated to 225 lbs. • Soft Strap bands to reduce soreness and ensure a smoother use • Heavy duty reinforced rubber soles for long life

Generators and Portable Heaters

Choosing a Generator

Selecting the right generator size depends on what you want to power.

Is your generator large enough to handle the job?



Add up the total watts of all lights, appliances, tools and other equipment to be connected to the generator. Be sure you select a generator that is large enough to handle both your current requirements and future needs.

Note: Check nameplates to determine wattage. If wattage is not shown but amps and voltage are given, use the formula below.

A

×

V

=

W

Amps

Volts

Watts

Example: 12.5 Amps x 120 Volts = 1500 Watts

Here are some examples of common wattage requirements:

Equipment	Wattage (approximate)
Space heater	200 – 1500
Compressor	200 – 2200
Drain cleaners	250
Drills (¼" – 1")	250 – 1000
Electric blower	400 – 2200
Portable grinder	1000 – 2500

Choosing a Heater

Selecting the right heater depends on the size of the space you want to warm.

Is your heater large enough to handle the job?



In general:



36,000 BTUs

WILL HEAT



10,000 cubic ft. of air

UP TO



20° F

It is also important to choose the correct fuel for your heater. Kerosene is an inexpensive option that provides consistent heat, perfect for warming everything from workshops to construction sites.

Note: Proper ventilation is required during operation.

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Generators	
	 	 
MODEL	MI-T-M ChoreMaster® 6500	MI-T-M GEN-3500-IMM1
Sales Number	1028-18952	1026-21059
Max. AC Output	6500 Watts	3500 Watts
Rated AC Output	6500 Watts	3200 Watts
Engine	420cc Mi-T-M OHV	212cc Mi-T-M OHV
CO Detector	Yes	Yes
Frequency (Hertz)	60	60
Receptacles	(2) 120V, 20A GFCI Duplex; (1) 120V, 30A Twist Lock, (1) 120V/240V, 30A Twist Lock	(1) 120V, 20A GFCI duplex; (1) 120V, 30A Twist Lock, (1) 12V DC 8.3AA
Max. Amps (120V/240V)	54.1/27.0	29.2
Continuous Amps (120V/240V)	54.1/27.0	N/A
Fuel Capacity	7.53 Gallons	1.8 Gallons
Run Time @ Full Load	8.8 Hours	4.0 Hours
Weight	183 Lbs.	66 Lbs.

Portable Heaters

Sherwin-Williams carries a complete line of accessories. See store for details.

Application	Portable Heaters	
		
MODEL	MI-T-M MH-0135-0M11	MI-T-M MH-0190-0M11
Sales Number	1027-32617	1028-37127
Heat Output (BTU)	135,000	190,000
Hot Air Flow	321 CFM	409 CFM
AC Power	120V, 60Hz, 2.1 Amps	120V, 60Hz, 2.5 Amps
Motor Size	1/3 HP	1/2 HP
Fuel Tank Capacity	10.6 Gallons	13.2 Gallons
Fuel Consumption	0.97 Gal./Hr.	1.37 Gal./Hr.
Max. Operating Hours	11 Hrs.	10 Hrs.
Heating Area	3,375 Sq. Ft.	4,750 Sq. Ft.
Weight (Net)	54 Lbs.	62 Lbs.

Service Centers



Offering the Finest
Spray Equipment Repair Service

At Sherwin-Williams, you'll get the most complete line of quality paints, stains, masonry coatings and painting supplies, backed by expert technical advice and more than 4,000 locations. Call (800) 524-5979 to have a professional representative contact you.

Below you will find your local Sherwin-Williams paint sprayer equipment repair and maintenance locations.

State	City	Address	Phone
AK	ANCHORAGE	245 POST RD	(907) 272-5550
AL	BIRMINGHAM	1501 3RD AVE S	(205) 251-4125
AL	HUNTSVILLE	621 MERIDIAN ST N	(256) 533-2292
AL	MOBILE	5250 KOOIMAN RD	(251) 443-6572
AR	SPRINGDALE	3855 TREAT LN	(479) 751-2721
AZ	GILBERT	566 E GERMANN RD STE 104	(480) 909-3668
AZ	PHOENIX	2135 E JONES AVE	(602) 254-7310
AZ	TUCSON	1311 E AJO WAY STE 121	(520) 617-0326
CA	BAKERSFIELD	2913 UNICORN RD	(661) 399-2987
CA	FRESNO	6584 N BLACKSTONE AVE	(559) 448-8088
CA	GARDENA	17500 SOUTH MAIN ST	(310) 329-0831
CA	SACRAMENTO	1015 N MARKET BLVD STE 1	(916) 574-9560
CA	SAN DIEGO	6625 MIRAMAR RD	(858) 453-6260
CA	VAN NUYS	15725 SATICOY ST	(818) 785-3003
CA	WALNUT CREEK	2700 N MAIN ST	(925) 464-4964
CO	COLORADO SPRINGS	1370 N NEWPORT RD	(719) 597-6556
CO	DENVER	1441 W BAYAUD AVE STE 2B	(303) 777-3434
CO	FREDERICK	8245 W I-25 FRONTAGE RD UNIT 1	(720) 713-5011
CT	NORTH HAVEN	2 MONTOWESE AVE	(203) 745-5238
DE	GEORGETOWN	22309 DUPONT BLVD	(302) 217-7079
DE	NEW CASTLE	70 SOUTHGATE BLVD	(302) 328-7660
FL	FORT MYERS	12215 S CLEVELAND AVE	(239) 936-8558
FL	JACKSONVILLE	6192 TOWNSEND RD	(904) 771-3511
FL	ORLANDO	4206 N ORANGE BLOSSOM TRL	(407) 291-8952
FL	PANAMA CITY	3407 WEST HWY 98	(850) 481-7771
FL	PENSACOLA	3117 N PALAFOX ST	(850) 432-4173
FL	TALLAHASSEE	1818 THOMASVILLE RD	(850) 224-0109
GA	COLUMBUS	141 CHALLENGER CT	(706) 322-1553
GA	LAWRENCEVILLE	524 LYLE CIR	(770) 963-8174
GA	SAVANNAH	1851 CHATHAM PKWY	(912) 239-9795
GA	WARNER ROBINS	351 S HOUSTON LAKE RD	(478) 971-1402
IA	BETTENDORF	3548 STATE ST	(563) 441-0144
IA	CEDAR RAPIDS	3501 J ST SW	(319) 364-5036
IA	DES MOINES	920 MORGAN ST STE T	(515) 280-3365
ID	MERIDIAN	3500 E COMMERCIAL CT #102	(208) 887-9550
IL	DECATUR	796 E WOOD ST	(217) 429-4205
IL	LISLE	2950 OGDEN AVE STE 105	(630) 778-6396
IL	PEORIA	1022 W PIONEER PKY	(309) 691-4058
IL	SOUTH HOLLAND	510 ARMORY DR	(708) 339-8110
IN	FORT WAYNE	3425 N CLINTON ST	(260) 484-8508

Locations subject to change.

State	City	Address	Phone
IN	INDIANAPOLIS	221 S FRANKLIN RD BLDG 7-G	(317) 898-9261
KS	WICHITA	1705 N WABASH ST	(316) 265-6291
KY	LEXINGTON	915 MURRAY DR STE 329	(859) 255-7736
KY	LOUISVILLE	4702A POPLAR LEVEL RD	(502) 969-1125
LA	BATON ROUGE	5807 SIEGEN LANE	(225) 293-0203
LA	JEFFERSON	4925C JEFFERSON HWY	(504) 733-9051
LA	SHREVEPORT	3204 W 70TH STREET	(318) 686-7341
MA	MEDFORD	59 HICKS AVE	(781) 396-5544
MA	WORCESTER	47 MILTON STREET	(508) 755-8633
MD	BALTIMORE	11 S CENTRAL AVE	(410) 732-4887
MD	BELTSVILLE	6401-2 VIRGINIA MANOR RD	(301) 902-3090
MD	FREDERICK	7307 GROVE RD	(240) 971-7025
ME	WESTBROOK	100 LARRABEE RD STE 300	(207) 856-6766
MI	BYRON CENTER	6030 CLYDE PARK AVE SW STE E	(616) 551-2644
MI	CANTON	8675 RONDA DR	(734) 414-9300
MI	DETROIT	13415 LYNDON ST	(313) 491-5650
MN	SAINT PAUL	284 E LAFAYETTE FRONTAGE RD	(651) 224-5337
MO	N KANSAS CITY	1737 MACON ST	(816) 283-0444
MO	SPRINGFIELD	535 E SAINT LOUIS ST	(417) 862-7483
MO	ST LOUIS	2145 SCHUETZ RD	(314) 567-1111
MS	RICHLAND	700 US HIGHWAY 49 S #B	(601) 939-4537
MS	TUPELO	526 W MAIN ST	(662) 842-4882
MT	BILLINGS	2051 ROSEBUD DR	(406) 655-9801
NC	CHARLOTTE	4601 EQUIPMENT DRIVE	(704) 596-4705
NC	GREENSBORO	1415 E BESSEMER AVE	(336) 275-3331
NC	RALEIGH	6601 HILLSBOROUGH ST STE 119	(919) 854-7701
NC	WINSTON-SALEM	651 PETERS CREEK PKWY	(336) 722-1311
NE	LINCOLN	208 NW 20TH ST	(402) 476-3100
NE	OMAHA	9317 J ST	(402) 592-0770
NJ	HAINESPORT	1451 ROUTE 38	(609) 267-8666
NJ	MOONACHIE	185 MOONACHIE RD	(201) 440-2660
NV	LAS VEGAS	6285 S VALLEY VIEW BL #I	(702) 382-4994
NY	CHEEKTOWAGA	2578 WALDEN AVE	(716) 685-1444
NY	MENANDS	37 SIMMONS LANE BLDG A STE 4	(518) 459-1050
NY	ROCHESTER	830 EMERSON ST	(585) 458-3120
NY	SYRACUSE	2380 ERIE BLVD EAST	(315) 446-1762
OH	BRUNSWICK	2872 CENTER RD	(330) 225-9729
OH	CINCINNATI	1150 W 8TH ST STE 112	(513) 621-1630
OH	COLUMBUS	2121 CITYGATE DR	(380) 777-6667
OH	DAYTON	2390 ARBOR BLVD	(937) 298-8691
OH	LEWIS CENTER	7719 GRAPHICS WAY STE B	(740) 909-7069
OH	LIMA	572 W. MARKET ST	(419) 222-7045
OH	TOLEDO	3062 MONROE ST	(419) 243-8121
OK	OKLAHOMA CITY	300 S WESTERN AVE	(405) 236-8621
OK	TULSA	3699 S 73RD EAST AVE	(918) 660-0997
OR	EUGENE	3390 W 11TH ST #B	(541) 345-5130
PA	PITTSBURGH	1100 WESTERN AVE	(412) 322-2923
PA	SCRANTON	811 SOUTH WASHINGTON AVE	(570) 342-9276
PA	SPRINGFIELD	37 BALTIMORE PIKE	(610) 328-0788
RI	WARWICK	77 WALNUT ST	(401) 781-6615
SC	COLUMBIA	2529 FOREST DR	(803) 256-3427
SC	GREER	3080 S HIGHWAY 14 UNIT C&D	(864) 234-4637
SC	HILTON HEAD	MOSS CREEK VILLAGE	(843) 707-9196

Locations subject to change.

State	City	Address	Phone
SC	MYRTLE BEACH	1626 PLAZA PLACE	(843) 448-6128
SC	N CHARLESTON	5350 RIVERS AVE	(843) 740-1363
SD	TEA	2215 BAKKER LANDING AVE	(605) 213-0016
TN	CHATTANOOGA	1315 E 23RD ST	(423) 624-1055
TN	KNOXVILLE	6201 BAUM DR	(865) 584-8624
TN	MEMPHIS	3850 LAMAR AVE STE 1	(901) 368-6001
TN	NASHVILLE	701 LEA AVE	(615) 256-1157
TX	DALLAS	11233 LEO LANE	(972) 241-0902
TX	EL PASO	1015 EASTSIDE RD	(915) 772-1704
TX	HOUSTON	6448 LONG POINT	(713) 263-9029
TX	HOUSTON	13045 GULF COMMERCE DR STE A	(346) 754-7056
TX	ODESSA	5001 JOHN BEN SHEPPARD PKWY	(432) 366-1203
TX	SAN ANTONIO	4243 INDUSTRIAL CENTER	(210) 653-7125
TX	TYLER	305 S BECKHAM AVE	(903) 592-6537
UT	WEST VALLEY CITY	3171 W 2100 S	(801) 975-1726
VA	LYNCHBURG	2100 FORT AVENUE	(434) 847-4722
VA	NORFOLK	1373 INGLESIDE RD	(757) 853-4371
VA	RICHMOND	6564 W BROAD ST	(804) 285-8231
WA	SPOKANE	3200 E TRENT AVE BLDG 2 STE C	(509) 536-9700
WI	ASHWAUBENON	1053 WAUBE LN	(920) 339-6150
WI	HOLMEN	3902 CIRCLE DR	(608) 781-1009
WI	MADISON	2030 S STOUGHTON RD	(608) 226-0602
WI	WAUWATOSA	6634 W NORTH AVE	(414) 259-5116
WY	CASPER	2590 REVENUE BLVD #1	(307) 472-0265

Territory	City	Address	Phone
BC	KELOWNA	1640 DILWORTH DR	(778) 940-0427
BC	VANCOUVER	1250 VENABLES ST	(604) 254-4788
BC	VICTORIA	524 E CULDUTHEL RD	(250) 385-4455
MB	WINNIPEG	1045 ST JAMES ST	(204) 982-6300
ON	CAMBRIDGE	15 SHELTON DR	(519) 622-7882
ON	KINGSTON	101 BINNINGTON CRT UNIT 1	(613) 544-0005
ON	WINDSOR	9009 TWIN OAKS DR	(519) 735-0296
ON	WOODBRIIDGE	4140 STEELES AVE W	(905) 264-6616
QC	BROSSARD	3500 BLVD MATTE LOCAL 210	(450) 444-0707
QC	LAVAL	3461 INDUSTRIEL BLVD	(450) 967-3000
QC	MONTREAL	8150 RUE DU CREUSOT	(514) 328-8852
QC	QUEBEC	1040 BOUL PIERRE-BERTRAND	(418) 682-8066

Locations subject to change.



Sanding, Abrasives and Dust Extractors


Choosing the Right Festool® Sander

All Festool® sanders are performance-tuned for excellent results, less vibration, and with optimum dust management design for cleaner surfaces and cleaner work environments in the shop or on the jobsite.

What are your productivity needs?



If you need...	Choose the following sander
More flexibility for less fatigue	ETS EC 125/3 EQ
A great sander for drywall and ceiling texture removal	PLANEX Easy LHS-E 225
A sander for tight corners and fine finishes	DTS 400 REQ-Plus
Exceptional performance for flat and vertical spaces	RTS 400 REQ-Plus
A multi-task sander from heavy removal to finishing	ROTEX RO 90 FEQ-Plus
	ROTEX RO 125 FEQ-Plus
	ROTEX RO 150 FEQ-Plus
Organization and compact storage for ease of mobility	Assortment Abrasive Systainer ³

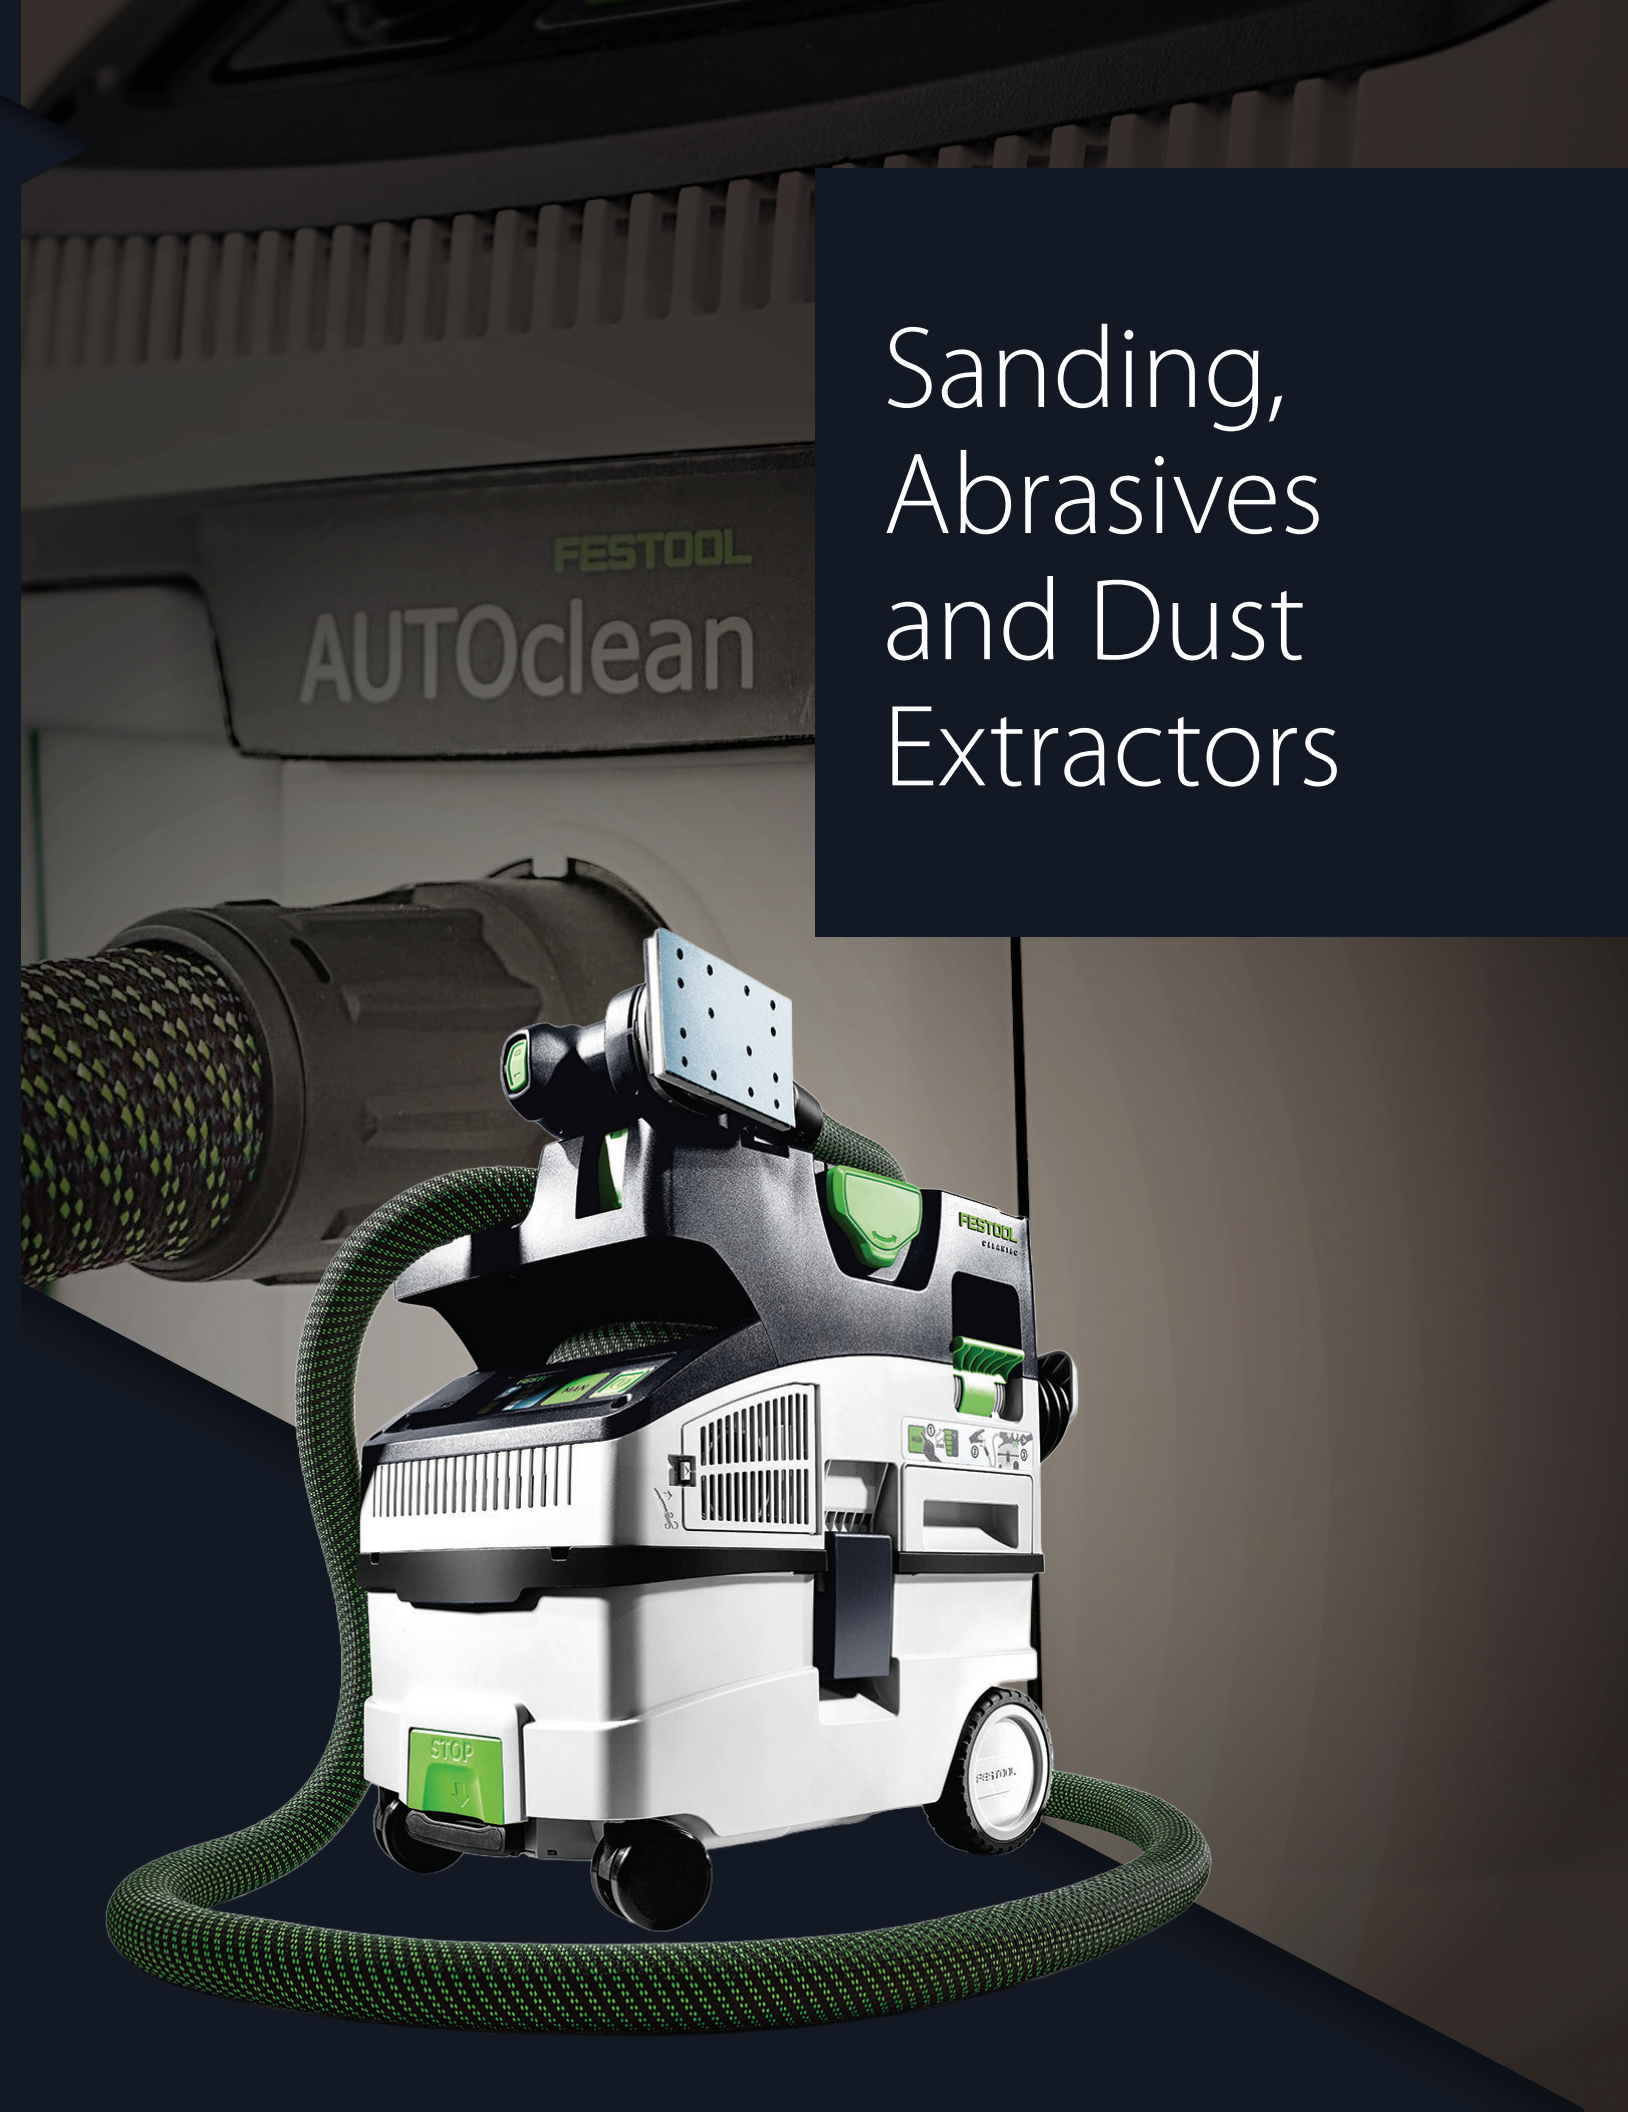

Choosing the Right Festool® Abrasives

Granat is Festool’s most long-lasting and highest-performing abrasive. It is well suited for nearly all applications, including:

- ✓ Solid wood

✓ Composite wood

✓ Varnish

✓ Paint
- ✓ Drywall/filler

✓ Solid surface

✓ Fiberglass

✓ Plastic

What sander model are you using?



For these sander models...	Use these Granat abrasives
RO 90	P40 – P1500 Grit
RO 125, ETS 125, ETS EC 125, RO 150	P40 – P1500 Grit
DTS 400, RTS 400	P40 – P400 Grit
PLANEX LHS	P40 – P320 Grit

Choosing the Right Festool® Dust Extractor

Stay clean and efficient with Festool’s Dust Extraction systems. They provide quicker cleanup and smoother finishes while helping to protect the air you breathe.

What is your jobsite environment like?



When choosing a Festool Dust Extraction system, consider:

1. Types of work at your jobsite:
- Sawing

Sanding

Routing

Drilling

Planing

Cleaning
2. Volume and forms of debris:
- Minimal

Fine/drywall

Moderate

Wet

Large

Additional features:




On-site cleanup



Bluetooth® integration



Mobility/portability



Capacity

Sherwin-Williams carries a complete line of accessories. See store for details.

Performance Needs	Flexible, Less Fatigue	LED-lit, Cordless Sanders		Drywall Sander, Wall Cleaner & Texture Removal	
	 	 	 	 	 
MODEL	ETS EC 125/3 EQ	ETSC 2 125 (5")	ETSC 2 150 (6")	PLANEX EASY LHS-E 225	PLANEX LHS-2 225
Sales Number	1022-29267	1033-85217	1033-85324	1014-88302	1023-34539
Standard Package Includes	StickFix Soft Sander Backing Pad Plug-It Power Cord Systainer ³ SYS3 M 187	PR ETSC 2 125 Protector ST D 125-M8-W Sander Backing Pad SB-Longlife ETSC 2 Dust Bag Systainer ³ SYS3 M 187	PR ETSC 2 150 Protector FUSION-TEC ST D150/MJ2-M8-W Sander Backing Pad SB-Longlife ETSC 2 Dust Bag Systainer ³ SYS3 M 187	StickFix Sanding Pad — Extra Soft Plug-It Power Cord LHS-E 225 Carrying Bag	5X Granat P180 Sanding Pad 220mm Plug-It Power Cord Interface Pad Systainer ³ SYS3 XXL 337
Power Consumption	400 Watts	18V Battery	18V Battery	400 Watts	400 Watts
LED Lit	—	☑	☑	—	—
Speed	Eccentric Motion Speed 6,000 – 10,000 RPM	Eccentric Motion Speed 6,000 – 10,000 RPM	Eccentric Motion Speed 6,000 – 10,000 RPM	Idle Engine Speed 400 – 920 RPM	Eccentric 5,000 – 8,500 RPM
Sanding Pad Dia.	Interchangeable 5" (125 mm)	Interchangeable 5" (125 mm)	Interchangeable 6" (150 mm)	Interchangeable 8.5" (220 mm) Abrasive dia. 8.9" (225 mm)	8-7/8" (225 mm)
Sanding Stroke	1/8" (3 mm)	9/64" (3.5 mm)	9/64" (3.5 mm)	—	3/16" (4 mm)
Dust Extraction Connection Dia.	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" / 1-7/16" (27 mm/36 mm)
Weight	2.65 Lbs. (1.2 kg)	2.65 Lbs. (1.2 kg)	2.65 Lbs. (1.2 kg)	8.8 Lbs. (4 kg)	8.82 Lbs. (4 kg)

Sherwin-Williams carries a complete line of accessories. See store for details.

Corner & Edge Ranged Performance	Flat & Vertical Ranged Performance	Versatile, Multi-Task Sander		
 	 	 	 	 
DTS 400 REQ-PLUS	RTS 400 REQ-PLUS	ROTEX RO 90 FEQ-PLUS	ROTEX RO 125 FEQ-PLUS	ROTEX RO 150 FEQ-PLUS
1020-66024	1020-66016	1023-34554	1015-84795	1021-25523
StickFix Soft Sander Backing Pad 100x150 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer ³ SYS3 M 187	StickFix Soft Sander Backing Pad 80x133 Plug-It Power Cord Edge Protector Long-life Dust Bag Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Delta Sanding Pad & Edge Protector Plug-It Power Cord Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer ³ SYS3 M 187	FastFix Round Soft Sander Backing Pad Edge Protector Plug-It Power Cord Systainer ³ SYS3M 237
250 Watts	250 Watts	400 Watts	500 Watts	720 Watts
—	—	—	—	—
Idle Engine Speed 6,000 – 12,000 RPM	Idle Engine Speed 6,000 – 12,000 RPM	Rotex Rotary 260 – 520 RPM Eccentric 3,500 – 7,000 RPM	Rotex Rotary 300 – 600 RPM Eccentric 3,000 – 6,000 RPM	Rotex Rotary 320 – 660 RPM Eccentric 3,300 – 6,800 RPM
Interchangeable 3-15/16" x 5-29/32" (100 mm x 150 mm)	Interchangeable 3-5/32" x 5-1/4" (80 mm x 133 mm)	FastFix 3.5" (90 mm) round OR 3.6" (90 mm) delta	FastFix 5" (125 mm)	FastFix 6" (150 mm)
1/16" (2 mm)	1/16" (2 mm)	1/8" (3 mm)	9/64" (3.6 mm)	3/16" (5 mm)
1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)	1-1/16" (27 mm)
2.65 Lbs. (1.2 kg)	2.65 Lbs. (1.2 kg)	3.31 Lbs. (1.5 kg)	4.19 Lbs. (1.9 kg)	5.07 Lbs. (2.3 kg)

Backing Pads/Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.

For use with sander model:

RO 90 FEQ – 3.5" (90 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30825



Interface Sander Backing Pad

- For profiles and contours

1014-30833



Sander Backing Pads 2x

- Hard – Snap Stud

1014-30247

For use with sander model:

RO 125 FEQ – 5" (125 mm)



FastFix Sander Backing Pad – Soft

- High-temp resistant for heavy-duty applications

1014-30577

For use with sander model:

RO 150 FEQ – 6" (150 mm)



FastFix Sander Backing Pad - Soft

- High-temp resistant for heavy-duty applications

1015-85750



For use with sander model:

ETS EC 125/3 - 5" (125 mm)



Sander Backing Pad – Soft

- Regular density for most general-purpose applications

1014-30023



Assortment Abrasive Systainer³ 90
SYS-STF D90/93V GR

1023-34471

Includes:

V93	P60	10 qty
V93	P80	10 qty
V93	P120	10 qty
V93	P180	10 qty
D90	P60	10 qty
D90	P80	20 qty
D90	P120	20 qty
D90	P180	10 qty
D90	Interface Pad	1 qty

Granat abrasives compatible with sander model:		
RO 90		
Grit	Qty.	Sales Number
P80 (triangular)	50	1014-30593
P120 (triangular)	100	1014-30601
P180 (triangular)	100	1014-30619
P220 (triangular)	100	1014-45344
P60 (orbital)	50	1014-30528
P80 (orbital)	50	1014-30536
P120 (orbital)	100	1014-30544
P180 (orbital)	100	1014-30551
P220 (orbital)	100	1014-45435

Granat abrasives compatible with sander models:		
RO 125, ETS 125, ETSC 125, ETS EC 125		
Grit	Qty.	Sales Number
P60	50	1014-30478
P80	50	1014-30486
P120	100	1014-30494
P180	100	1014-30502
P220	100	1014-45468

Granat abrasives compatible with sander models:		
RO 150, ETS EC 150, ETS 150		
Grit	Qty.	Sales Number
P80	50	1015-85305
P120	100	1015-85321
P180	100	1015-85354
P220	100	1015-85362

Abrasives

Sherwin-Williams carries a complete line of accessories. See store for details.

Granat abrasives compatible with sander models:		
RTS 400, RTSC 400, LS 130		
Grit	Qty.	Sales Number
P80	50	1014-30221
P120	100	1014-30239
P180	100	1014-30254
P220	100	1014-45336

Granat abrasives compatible with sander models:		
DTS 400, DTSC 400		
Grit	Qty.	Sales Number
P80	50	1014-30338
P120	100	1014-30346
P180	100	1014-30254
P220	100	1014-45336




Assortment Abrasive Systainer³ 125
SYS-STF D125 GR

1023-34463

Includes:

D125	P60	10 qty
D125	P80	25 qty
D125	P120	25 qty
D125	P180	20 qty
D125	P220	20 qty
D125	Interface Pad	1 qty

Sherwin-Williams carries a complete line of accessories. See store for details.

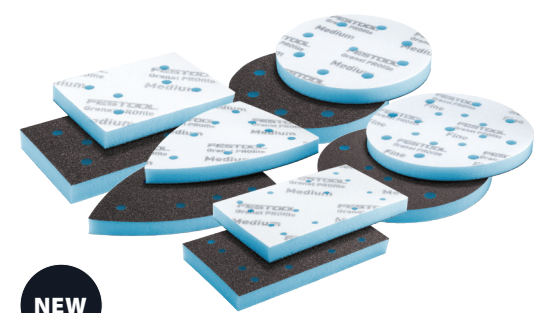


NEW

Granat PROfile Abrasives
Designed for Details. Engineered for Contours.

Whether you're working on intricate moldings, raised panels, rounded edges or turned spindles, Granat PROfile adapts to the surface for consistent, high-quality results.


Optimized for use with sanding power tools, this abrasive excels where traditional flat abrasives can't.

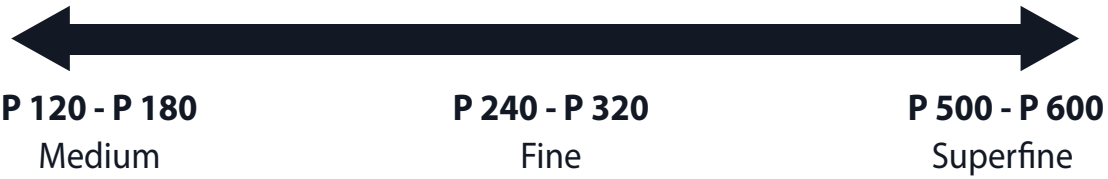

Sherwin-Williams carries a complete line of accessories. See store for details.

NEW

Granat PROfile					
Recommended Tool Use		 ES 150, ETS 150, ETSC 2 150, ETS EC 150, LEX 150, HSK-D 150	 ES 125, ETS 125, ETSC 125, ETSC 2 125, ETS EC 125		
Grit	Qty.	Item	S-W	Item	S-W
Medium	10	578792	1035-53137	578796	1035-53301
Fine	10	578793	1035-53244	578797	1035-53319
Superfine	10	578794	1035-53285	578798	1035-53327
Mixed Set	10	578795	1035-53293	578799	1035-53335

Recommended Tool Use		 RTS 400, RTSC 400, RS 400, RS 4, LS 130, HSK-A 80x130, HSK 80x133	 DTS 400, DTSC 400, DS 400		
Grit	Qty.	Item	S-W	Item	S-W
Medium	10	578800	1035-53343	578804	1035-53178
Fine	10	578801	1035-53145	578805	1035-53186
Superfine	10	578802	1035-53152	578806	1035-53194
Mixed Set	10	578803	1035-53160	578807	1035-53202

Recommended Tool Use		 Compatible sanders		
Grit	Qty.	Item	S-W	
Medium	10	578808	1035-53210	
Fine	10	578809	1035-53228	
Superfine	10	578810	1035-53236	
Mixed Set	10	578811	1035-53251	



Dust Extractors

Sherwin-Williams carries a complete line of accessories. See store for details.

Performance Needs	Medium Debris, Excellent Dust Capture, Medium Capacity	Fine Dust Debris, High-Performance Capture, XL Capacity
	FESTOOL 	FESTOOL 
MODEL	CT MIDI I *Can be used with most sanders	CT 36 E AC HEPA *Compatible with all Festool Sanders **Required for use with PLANEX Sanders
Sales Number	6511-30379	1015-84712
Standard Package Includes	Anti-Static Suction Hose 1-1/16" x 11.5' (27 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece)	Anti-Static Suction Hose 1-7/16" x 11.5' (36 mm x 3.5 m) Filters HEPA (1 piece) Disposable Filter Bag (1 piece) Plastic Liner (1 piece)
Power Consumption	400 – 1,200 Watts	350 – 1,200 Watts
Container Capacity	4 Gal. (15 L)	9.5 Gal. (36 L)
Filter Bag Capacity	3.3 Gal. (12.5 L)	9.0 Gal. (34 L)
Dimensions (L x W x H)	18-1/2" x 12-19/32" x 19-1/2" (470 mm x 320 mm x 495 mm)	25" x 14-3/8" x 23-1/2" (635 mm x 365 mm x 597 mm)
Max Suction Capacity	130 CFM (3,700 L/min)	137 CFM (3,900 L/min)
Weight	24.91 Lbs. (11.3 kg)	33.51 Lbs. (15.2 kg)



Standard Cleaning Set

- Compact and lightweight set for quick cleanup in confined spaces.

1025-37867

Includes:

Dust extractor tube	Suction brush
Extension tube (3x)	Floor nozzle
Crevice nozzle	SYS3 M 137



SELF CLEAN Filter Bag – CT MIDI (5 pieces)

- For CT MIDI units manufactured prior to 2019.

1014-30932

Dust Extractor Accessories

Sherwin-Williams carries a complete line of accessories. See store for details.



Suction Brush D 36 SP

- Dia. 2-13/16" (71 mm). Accepts D 27 mm and D 36 mm hoses and tubes.

1014-30692



SHERWIN-WILLIAMS®

**THE SINGLE SOURCE FOR ALL
YOUR EQUIPMENT NEEDS.**